
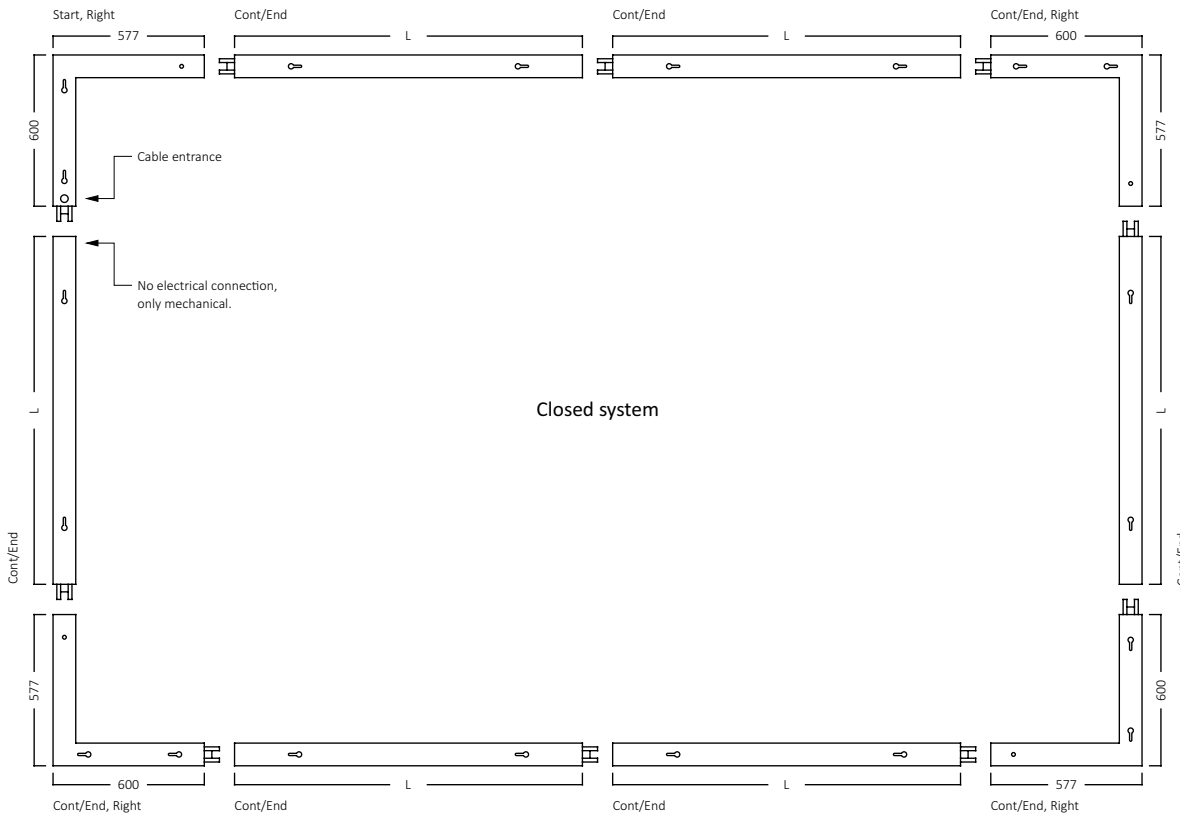
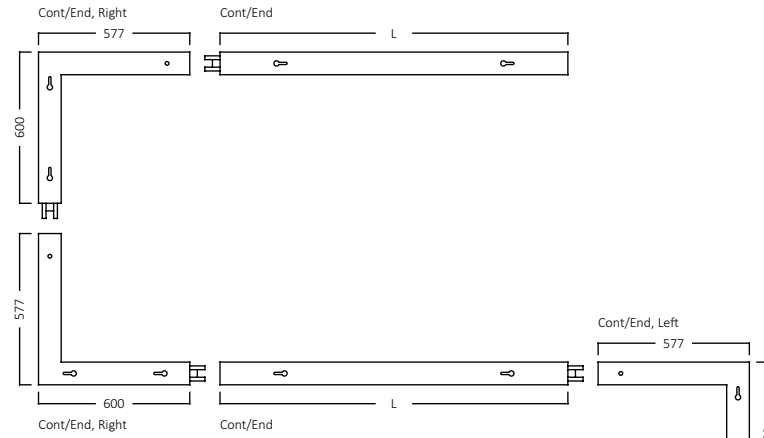
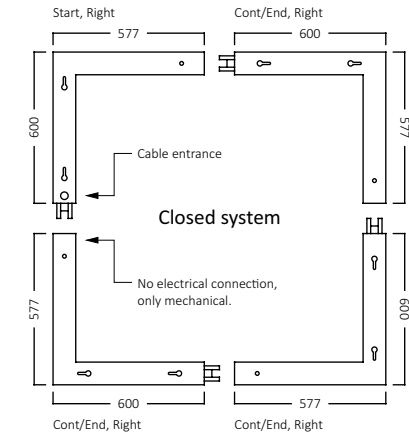


# STELLA - Continuous System Installation Examples

# STELLA Surface Mounted

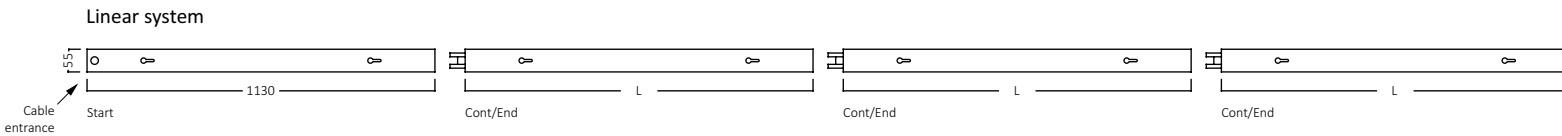

START	
OPAL	MICRO
SDS 1130 STD	SDS 1130 SMD

CONT / END	
OPAL	MICRO
SDC 1121 STD	SDC 1121 SMD
SDC 1401 STD	SDC 1401 SMD
SDC 1681 STD	SDC 1681 SMD
SDC 1961 STD	SDC 1961 SMD
SDC 2241 STD	SDC 2241 SMD
SDC 2521 STD	SDC 2521 SMD
SDC 2801 STD	SDC 2801 SMD

START RIGHT	
OPAL	MICRO
SDSR 6058 STD	SDSR 6058 SMD

START LEFT	
OPAL	MICRO
SDSL 6058 STD	SDSL 6058 SMD


CONT / END RIGHT	
OPAL	MICRO
SDTR 6058 STD	SDTR 6058 SMD

CONT / END LEFT	
OPAL	MICRO
SDTL 6058 STD	SDTL 6058 SMD

\*Opened systems should only start with "Start" modules.  
(SDS 1130 STD, SDS 1130 SMD)

\*Closed systems should only start with "Start, Right" or "Start, Left" modules.  
(SDSR 6058 STD, SDSR 6058 SMD, SDSL 6058 STD, SDSL 6058 SMD, SDTR 6058 STD, SDTR 6058 SMD, SDTL 6058 STD, SDTL 6058 SMD)

\*Low Lumen (LL) : Max length is 43 meters.  
\*Medium Lumen (ML) : Max length is 33 meters.  
\*High Lumen (HL) : Max length is 25 meters.

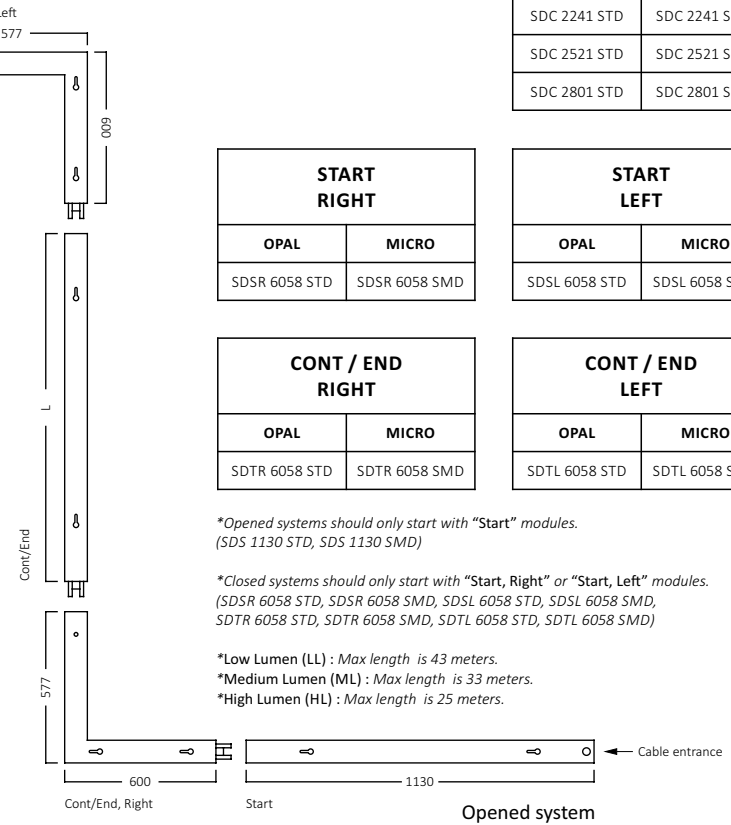

\*All drawings are "Top" view

