
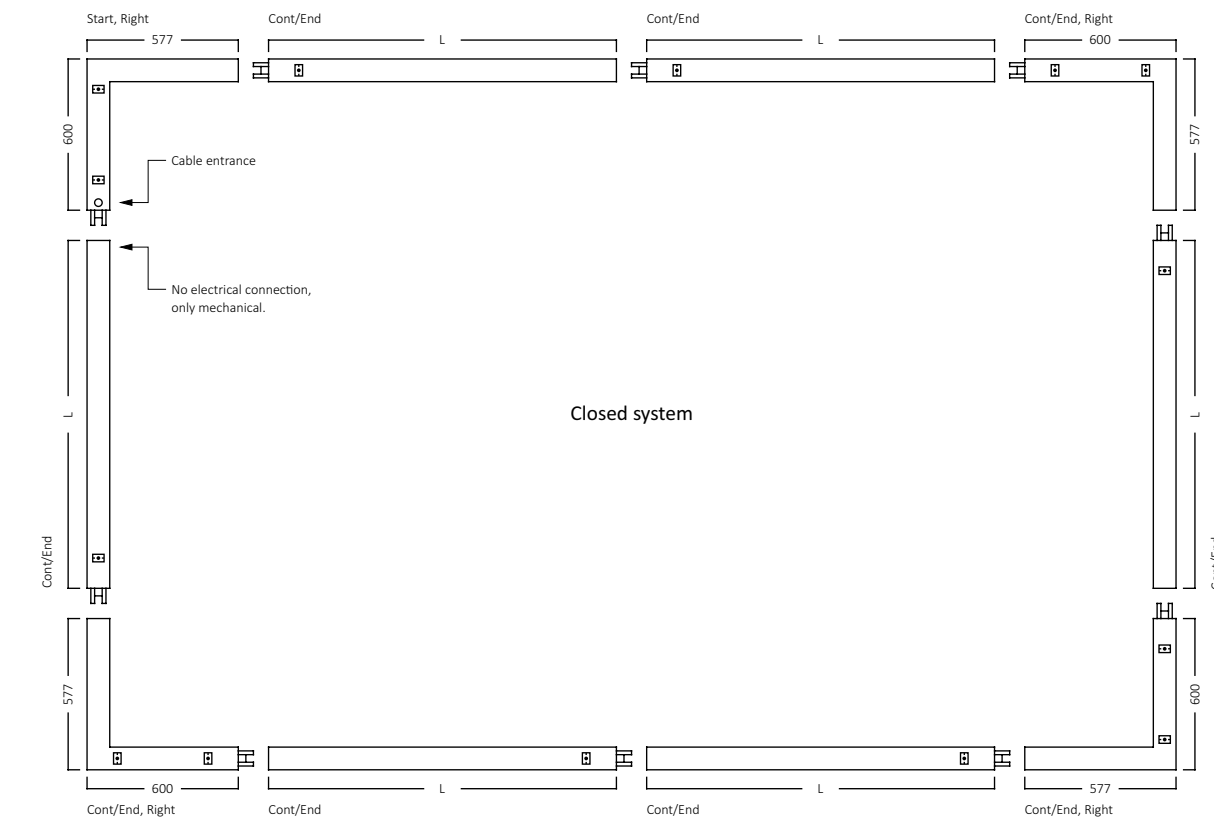
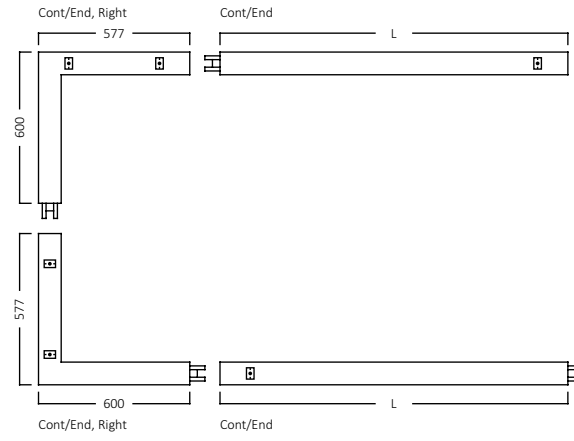
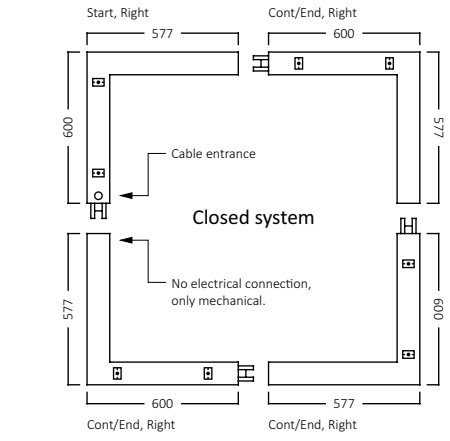


# STELLA - Continuous System Installation Examples

# STELLA Pendant Direct

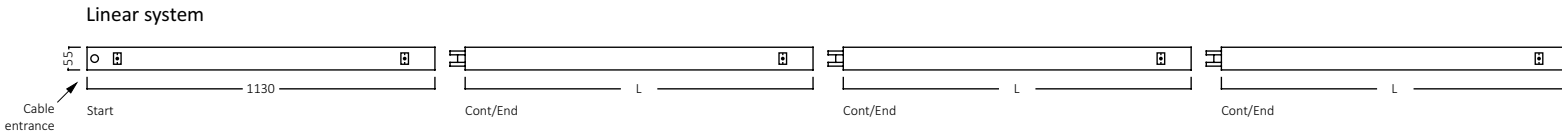

START	
OPAL	MICRO
SS 1130 STD	SS 1130 SMD

CONT / END	
OPAL	MICRO
SC 1121 STD	SC 1121 SMD
SC 1401 STD	SC 1401 SMD
SC 1681 STD	SC 1681 SMD
SC 1961 STD	SC 1961 SMD
SC 2241 STD	SC 2241 SMD
SC 2521 STD	SC 2521 SMD
SC 2801 STD	SC 2801 SMD

START RIGHT	
OPAL	MICRO
SSR 6058 STD	SSR 6058 SMD

START LEFT	
OPAL	MICRO
SSL 6058 STD	SSL 6058 SMD


CONT / END RIGHT	
OPAL	MICRO
STR 6058 STD	STR 6058 SMD

CONT / END LEFT	
OPAL	MICRO
STL 6058 STD	STL 6058 SMD

\*Opened systems should only start with "Start" modules.  
(SS 1130 STD, SS 1130 SMD)

\*Closed systems should only start with "Start, Right" or "Start, Left" modules.  
(SSR 6058 STD, SSR 6058 SMD, SSL 6058 STD, SSL 6058 SMD, STR 6058 STD, STR 6058 SMD, STL 6058 STD, STL 6058 SMD)

\*Low Lumen (LL) : Max length is 43 meters.  
\*Medium Lumen (ML) : Max length is 33 meters.  
\*High Lumen (HL) : Max length is 25 meters.

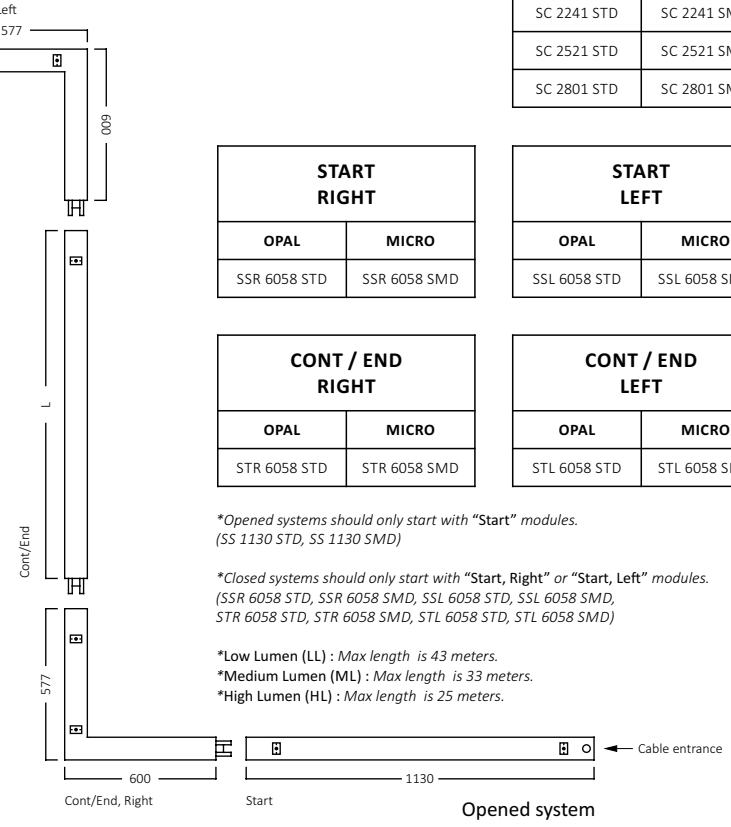

\*All drawings are "Top" view

