




# SR 2010 KST

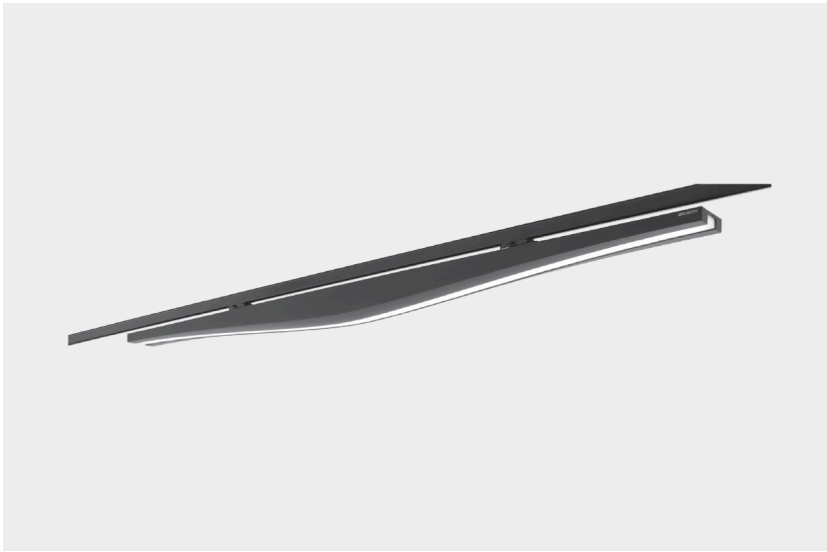

## Housing

Aluminum body with electrostatic powder coating.

## Optics

Microprism structured deglaring lens with high transmissivity.

## Led

High-efficacy double chip LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and  $Pf \geq 0.95$

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
SRKST.2010.52.30	52	3000	5010	>80	220 - 240 / 50 - 60	5,45
SRKST.2010.52.40	52	4000	5450	>80	220 - 240 / 50 - 60	5,45
SRKST.2010.37.30	37	3000	3270	>80	220 - 240 / 50 - 60	5,8
SRKST.2010.37.40	37	4000	3530	>80	220 - 240 / 50 - 60	5,8

