




# Cove 1 Opal

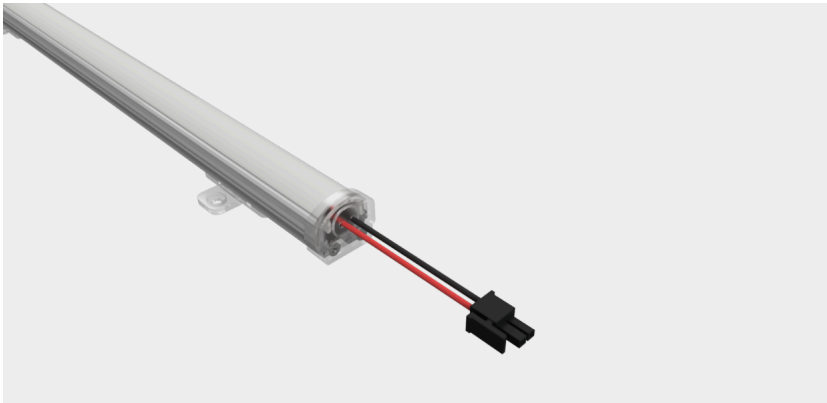

## Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap.

## Optics

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

## Led

High-efficacy mid power LED with CRI>80, achieving L70B50  $\geq$  50,000 hours of lifetime.

## Driver

24Vdc external type. Constant voltage output driver with high efficiency.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	L (mm)
SDCVI.135.2.30	2	3000	155	>80	24V DC	0,04	135
SDCVI.135.2.40	2	4000	165	>80	24V DC	0,04	135
SDCVI.260.4.30	4	3000	310	>80	24V DC	0,07	260
SDCVI.260.4.40	4	4000	330	>80	24V DC	0,07	260
SDCVI.505.8.30	8	3000	700	>80	24V DC	0,14	505
SDCVI.505.8.40	8	4000	745	>80	24V DC	0,14	505
SDCVI.1000.16.30	16	3000	1245	>80	24V DC	0,28	1000
SDCVI.1000.16.40	16	4000	1320	>80	24V DC	0,28	1000
SDCVI.1245.20.30	20	3000	1550	>80	24V DC	0,34	1245
SDCVI.1245.20.40	20	4000	1650	>80	24V DC	0,34	1245
SDCVI.1495.24.30	24	3000	1860	>80	24V DC	0,41	1495
SDCVI.1495.24.40	24	4000	1980	>80	24V DC	0,41	1495

