




DG 1100 CAR

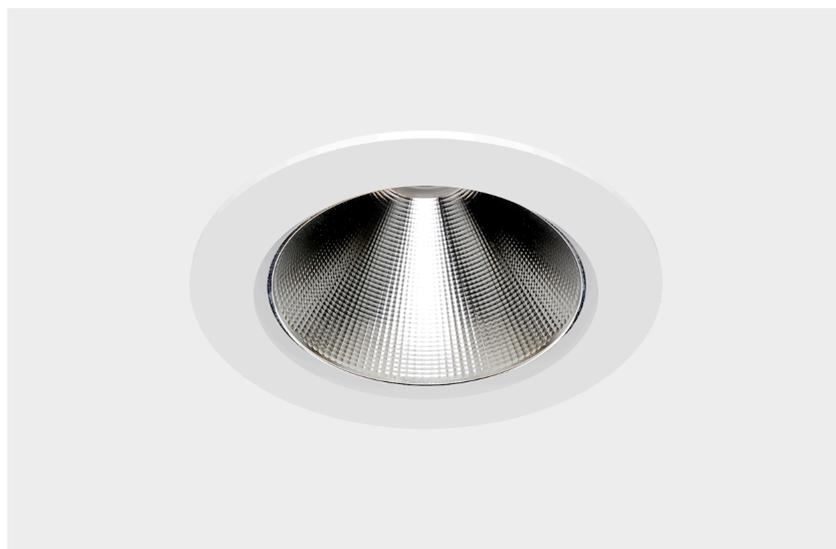

Housing

Aluminum frame with electrostatic powder coating and die-cast aluminum heatsink.

Optics

Anodized aluminum reflector, designed specially for LED modules.

Led

High-efficacy COB LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

Driver Constant current output LED driver with high efficiency and pf >0,9

Operating Temperature Range 0 °C/+35 °C

Options Dimming via DALI



| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) | Beam Angle |
|------------------|-----------|---------|-------------------|-----|---------------------|-------------|-------------------|--------------|
| LEQ115.1.1.FF.00 | 17 | 3100 | 1675 | >90 | 220 - 240 / 50 - 60 | 0,3 | Ø80 | 23° (Spot) |
| LEQ114.1.1.FF.00 | 17 | 3100 | 1765 | >90 | 220 - 240 / 50 - 60 | 0,3 | Ø80 | 43° (Medium) |
| LEX666.1.1.FF.00 | 17 | 3100 | 1840 | >90 | 220 - 240 / 50 - 60 | 0,3 | Ø80 | 60° (Flood) |

