




# Talia

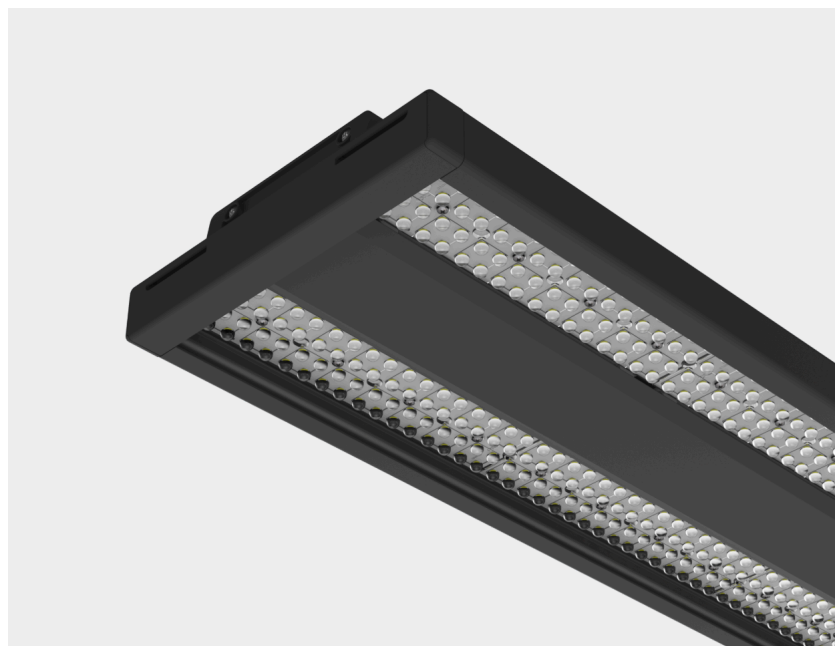

## Housing

Electrostatic powder coated aluminum extrusion profile

## Optic / Glass

Acrylic (PMMA) optical lens / Ultra Clear tempered glass

## Led

High-efficacy mid power LED, achieving L90B50  $\geq$  50,000 hours of lifetime

## Driver

Constant current output LED driver with high efficiency and  $Pf \geq 95$ .

## Ambient Temperature

-20 °C/+40 °C (With Emergency Lighting Unit : +5 °C/+35 °C)

## Options


1 or 3 hours emergency lighting kit  
Dimming via DALI

## Mounting Accessory


Choose accessories according to the product mounting type

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Beam Angle	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)
STAL. 0200.34.40.18	34	4000	5350	>80	220 - 240 / 50 - 60	18°	254	395	168	650-700
STAL. 0200.34.40.40	34	4000	5250	>80	220 - 240 / 50 - 60	40°	254	395	168	650-700
STAL. 0200.34.40.60	34	4000	5500	>80	220 - 240 / 50 - 60	60°	254	395	168	650-700
STAL. 0200.34.40.90	34	4000	4960	>80	220 - 240 / 50 - 60	90°	254	395	168	650-700
STAL. 0200.34.40.OB	34	4000	4790	>80	220 - 240 / 50 - 60	20°+70°	254	395	168	650-700
STAL. 0400.94.40.18	94	4000	15380	>80	220 - 240 / 50 - 60	18°	457	395	168	850-900
STAL. 0400.94.40.40	94	4000	14980	>80	220 - 240 / 50 - 60	40°	457	395	168	850-900
STAL. 0400.94.40.60	94	4000	15580	>80	220 - 240 / 50 - 60	60°	457	395	168	850-900
STAL. 0400.94.40.90	94	4000	14570	>80	220 - 240 / 50 - 60	90°	457	395	168	850-900
STAL. 0400.94.40.OB	94	4000	13660	>80	220 - 240 / 50 - 60	20°+70°	457	395	168	850-900
STAL. 0600.147.40.18	147	4000	24090	>80	220 - 240 / 50 - 60	18°	600	475	168	1140-1190
STAL. 0600.147.40.40	147	4000	23630	>80	220 - 240 / 50 - 60	40°	600	475	168	1140-1190
STAL. 0600.147.40.60	147	4000	24350	>80	220 - 240 / 50 - 60	60°	600	475	168	1140-1190


Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Beam Angle	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)
STAL. 0600.147.40.90	147	4000	22600	>80	220 - 240 / 50 - 60	90°	600	475	168	1140-1190
STAL. 0600.147.40.OB	147	4000	21360	>80	220 - 240 / 50 - 60	20°+70°	600	475	168	1140-1190
STAL. 0800.188.40.18	188	4000	31460	>80	220 - 240 / 50 - 60	18°	863	503	128	
STAL. 0800.188.40.40	188	4000	31020	>80	220 - 240 / 50 - 60	40°	863	503	128	
STAL. 0800.188.40.60	188	4000	31850	>80	220 - 240 / 50 - 60	60°	863	503	128	
STAL. 0800.188.40.90	188	4000	29640	>80	220 - 240 / 50 - 60	90°	863	503	128	
STAL. 0800.188.40.OB	188	4000	27980	>80	220 - 240 / 50 - 60	20°+70°	863	503	128	
STAL. 1000.245.40.18	245	4000	39910	>80	220 - 240 / 50 - 60	18°	1066	503	128	
STAL. 1000.245.40.40	245	4000	38430	>80	220 - 240 / 50 - 60	40°	1066	503	128	
STAL. 1000.245.40.60	245	4000	40910	>80	220 - 240 / 50 - 60	60°	1066	503	128	
STAL. 1000.245.40.90	245	4000	37830	>80	220 - 240 / 50 - 60	90°	1066	503	128	
STAL. 1000.245.40.OB	245	4000	35510	>80	220 - 240 / 50 - 60	20°+70°	1066	503	128	
STAL. 1200.294.40.18	294	4000	47920	>80	220 - 240 / 50 - 60	18°	1269	503	128	
STAL. 1200.294.40.40	294	4000	45680	>80	220 - 240 / 50 - 60	40°	1269	503	128	
STAL. 1200.294.40.60	294	4000	48990	>80	220 - 240 / 50 - 60	60°	1269	503	128	
STAL. 1200.294.40.90	294	4000	46150	>80	220 - 240 / 50 - 60	90°	1269	503	128	
STAL. 1200.294.40.OB	294	4000	43050	>80	220 - 240 / 50 - 60	20°+70°	1269	503	128	
STAL. 1400.344.40.18	344	4000	55890	>80	220 - 240 / 50 - 60	18°	1472	503	128	
STAL. 1400.344.40.40	344	4000	55020	>80	220 - 240 / 50 - 60	40°	1472	503	128	
STAL. 1400.344.40.60	344	4000	57020	>80	220 - 240 / 50 - 60	60°	1472	503	128	
STAL. 1400.344.40.90	344	4000	53360	>80	220 - 240 / 50 - 60	90°	1472	503	128	
STAL. 1400.344.40.OB	344	4000	50030	>80	220 - 240 / 50 - 60	20°+70°	1472	503	128	

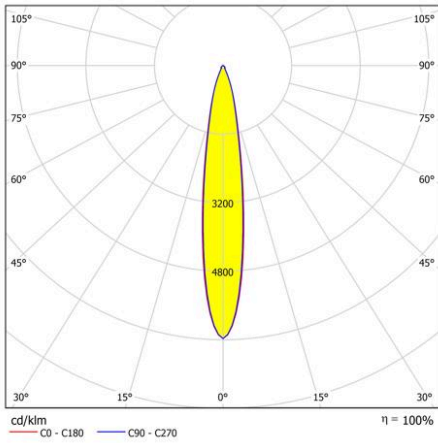


18°

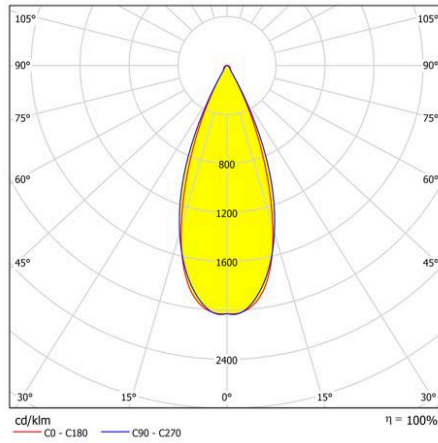


40°

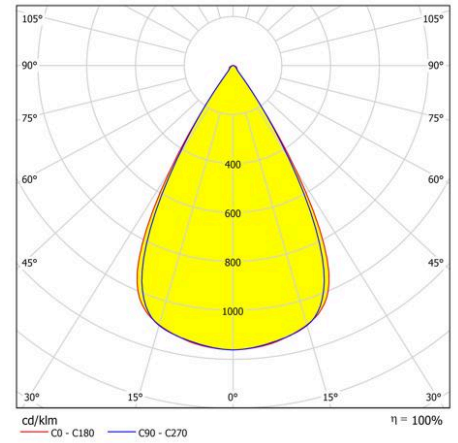

60°

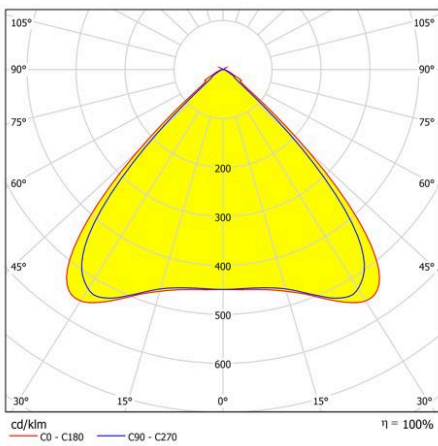

90°

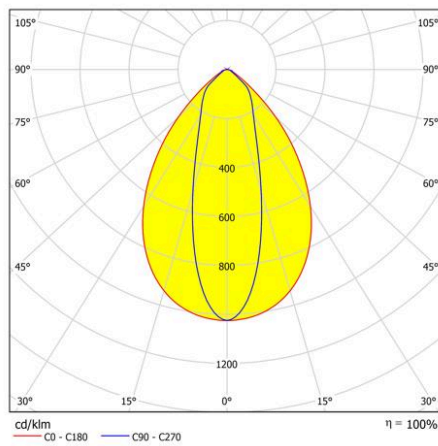

20°+70°

