




Strio-LL Opal

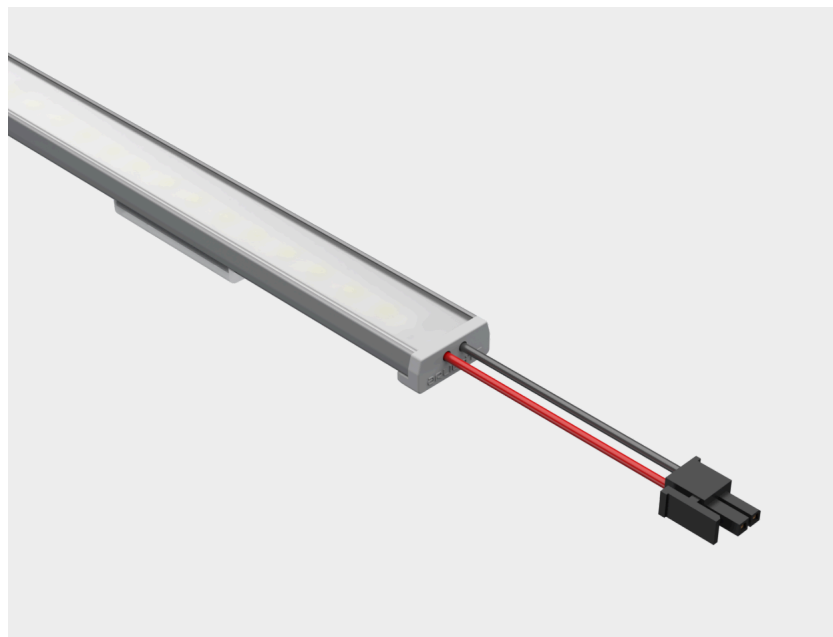

Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap

Diffuser

Opal, white, diffusing polycarbonate diffuser with lambertian light distribution

Led

High-efficacy mid power LED, achieving L70B50 \geq 50,000 hours of lifetime

Driver

24V external type. Constant voltage output driver with high efficiency

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)
SDSRL0140.1,5.40	1,5	4000	133	>80	24V DC	140
SDSRL0140.1,5.30	1,5	3000	130	>80	24V DC	140
SDSRL.0264.3.40	3	4000	268	>80	24V DC	264
SDSRL.0264.3.30	3	3000	262	>80	24V DC	264
SDSRL.0511.7.40	7	4000	535	>80	24V DC	511
SDSRL.0511.7.30	7	3000	524	>80	24V DC	511
SDSRL.1005.13.40	13	4000	1088	>80	24V DC	1005
SDSRL.1005.13.30	13	3000	1066	>80	24V DC	1055
SDSRL.1252.16.40	16	4000	1389	>80	24V DC	1252
SDSRL.1252.16.30	16	3000	1361	>80	24V DC	1252
SDSRL.1499.20.40	20	4000	1694	>80	24V DC	1499
SDSRL.1499.20.30	20	3000	1660	>80	24V DC	1499

