




Strio-LL Frosted

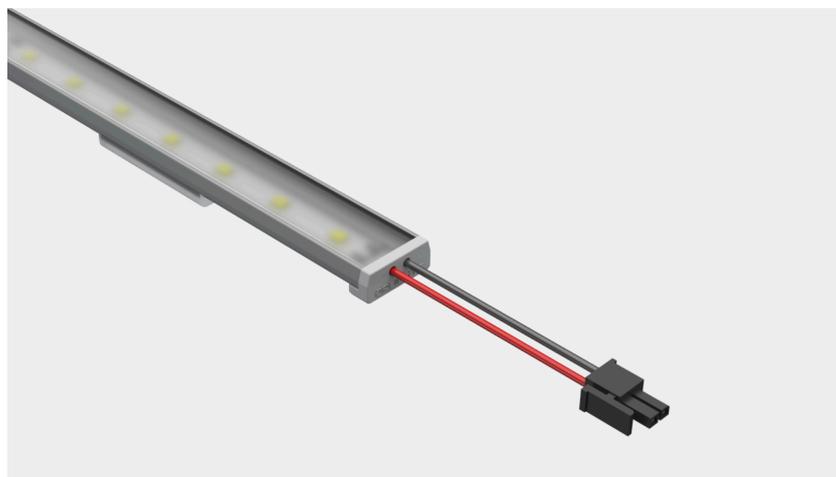

Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap

Diffuser

Opal, white, diffusing polycarbonate diffuser with lambertian light distribution

Led

High-efficacy mid power LED, achieving L70B50 \geq 50,000 hours of lifetime

Driver

24V external type. Constant voltage output driver with high efficiency

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)
SDSRLB0140.1,5.40	1,5	4000	162	>80	24V DC	140
SDSRLB0140.1,5.30	1,5	3000	159	>80	24V DC	140
SDSRLB.0264.3.40	3	4000	322	>80	24V DC	264
SDSRLB.0264.3.30	3	3000	315	>80	24V DC	264
SDSRLB.0511.7.40	7	4000	641	>80	24V DC	511
SDSRLB.0511.7.30	7	3000	628	>80	24V DC	511
SDSRLB.1005.13.40	13	4000	1305	>80	24V DC	1005
SDSRLB.1005.13.30	13	3000	1279	>80	24V DC	1055
SDSRLB.1252.16.40	16	4000	1667	>80	24V DC	1252
SDSRLB.1252.16.30	16	3000	1634	>80	24V DC	1252
SDSRLB.1499.20.40	20	4000	2048	>80	24V DC	1499
SDSRLB.1499.20.30	20	3000	2007	>80	24V DC	1499

