




# Strio-HL Opal

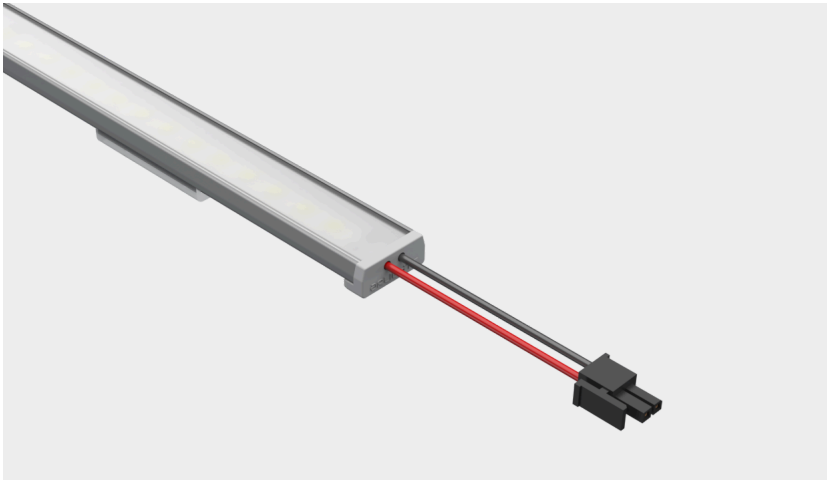

## Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap

## Diffuser

Opal, white, diffusing polycarbonate diffuser with lambertian light distribution

## Led

High-efficacy mid power LED, achieving L70B50  $\geq$  50,000 hours of lifetime

## Driver

24V external type. Constant voltage output driver with high efficiency

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)
SDSRH0140.3.40	3	4000	193	>80	24V DC	140
SDSRH0140.3.30	3	3000	189	>80	24V DC	140
SDSRH.0264.6.40	6	4000	412	>80	24V DC	264
SDSRH.0264.6.30	6	3000	416	>80	24V DC	264
SDSRH.0511.11.40	11	4000	769	>80	24V DC	511
SDSRH.0511.11.30	11	3000	754	>80	24V DC	511
SDSRH.1005.24.40	24	4000	1719	>80	24V DC	1005
SDSRH.1005.24.30	24	3000	1685	>80	24V DC	1055
SDSRH.1252.29.40	29	4000	2140	>80	24V DC	1252
SDSRH.1252.29.30	29	3000	2097	>80	24V DC	1252
SDSRH.1499.36.40	36	4000	2615	>80	24V DC	1499
SDSRH.1499.36.30	36	3000	2598	>80	24V DC	1499

