




Strio-HL Opal

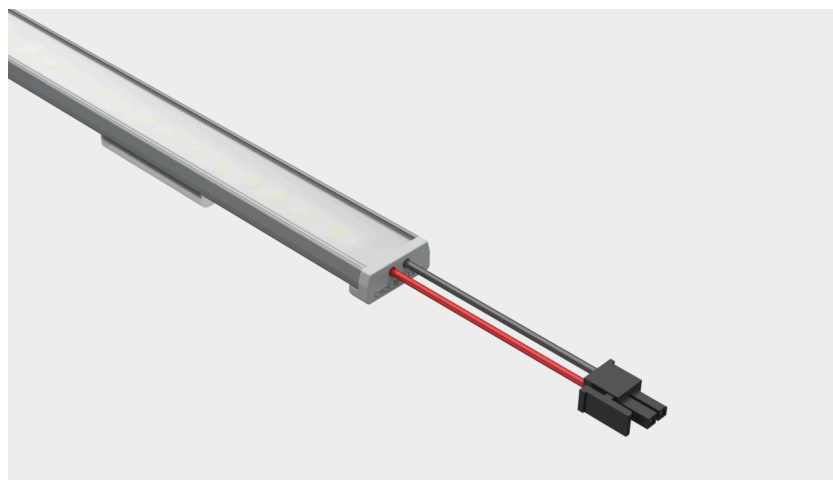

Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap

Diffuser

Opal, white, diffusing polycarbonate diffuser with lambertian light distribution

Led

High-efficacy mid power LED, achieving L70B50 \geq 50,000 hours of lifetime

Driver

24V external type. Constant voltage output driver with high efficiency

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)
SDSRH0140.3.40	3	4000	193	>80	24V DC	140
SDSRH0140.3.30	3	3000	189	>80	24V DC	140
SDSRH.0264.6.40	6	4000	412	>80	24V DC	264
SDSRH.0264.6.30	6	3000	416	>80	24V DC	264
SDSRH.0511.11.40	11	4000	769	>80	24V DC	511
SDSRH.0511.11.30	11	3000	754	>80	24V DC	511
SDSRH.1005.24.40	24	4000	1719	>80	24V DC	1005
SDSRH.1005.24.30	24	3000	1685	>80	24V DC	1055
SDSRH.1252.29.40	29	4000	2140	>80	24V DC	1252
SDSRH.1252.29.30	29	3000	2097	>80	24V DC	1252
SDSRH.1499.36.40	36	4000	2615	>80	24V DC	1499
SDSRH.1499.36.30	36	3000	2598	>80	24V DC	1499

