




# Strio-HL Frosted

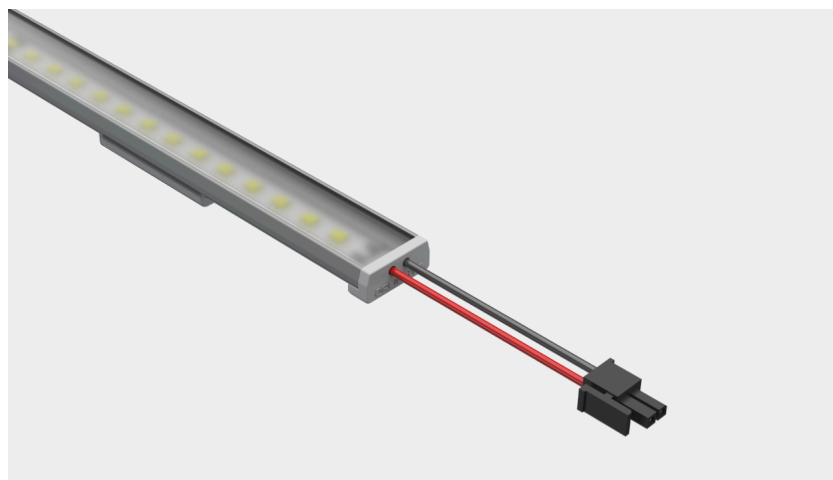

## Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap

## Diffuser

Frosted diffusing polycarbonate diffuser with lambertian light distribution

## Led

High-efficacy mid power LED, achieving L70B50 ≥ 50,000 hours of lifetime

## Driver

24V external type. Constant voltage output driver with high efficiency

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	L (mm)
SDSRHB0140.3.40	3	4000	234	>80	24V DC	140
SDSRHB0140.3.30	3	3000	229	>80	24V DC	140
SDSRHB. 0264.6.40	6	4000	498	>80	24V DC	264
SDSRHB. 0264.6.30	6	3000	496	>80	24V DC	264
SDSRHB. 0511.11.40	11	4000	941	>80	24V DC	511
SDSRHB. 0511.11.30	11	3000	922	>80	24V DC	511
SDSRHB. 1005.24.40	24	4000	2063	>80	24V DC	1005
SDSRHB. 1005.24.30	24	3000	2022	>80	24V DC	1055
SDSRHB. 1252.29.40	29	4000	2570	>80	24V DC	1252
SDSRHB. 1252.29.30	29	3000	2519	>80	24V DC	1252
SDSRHB. 1499.36.40	36	4000	3134	>80	24V DC	1499
SDSRHB. 1499.36.30	36	3000	3142	>80	24V DC	1499

