
Akrobat

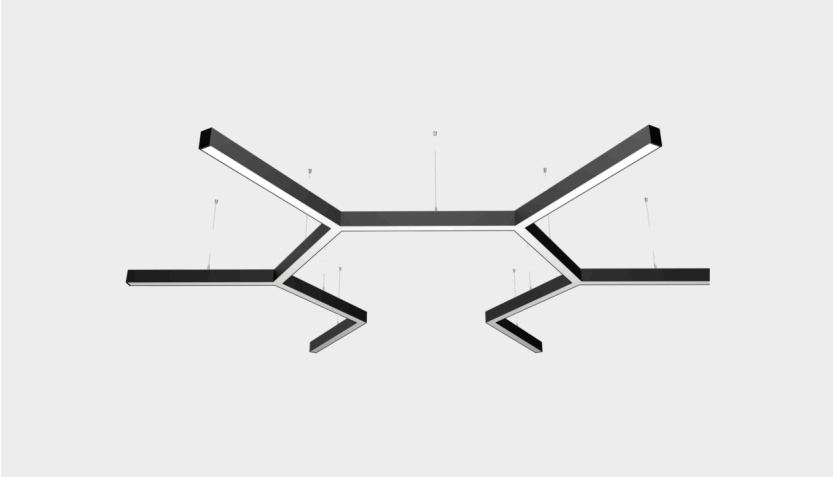

Housing
Matt natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

Optics
Opal, white, diffusing polycarbonate lens with lambertian light distribution.

Led
High-efficacy mid power LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime


Driver
24Vdc external type. Constant voltage output driver with high efficiency.

Operating Temperature Range
0 °C/+35 °C

Options
Dimming via DALI

Color
Matte natural anodized

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz
LLX546.0.0.00.00	10	4000	800	>80	24V DC
LLX547.0.0.00.00	10	4000	800	>80	24V DC
LLX548.0.0.00.00	10	4000	800	>80	24V DC
LLX549.0.0.00.00	10	4000	800	>80	24V DC
LLX550.0.0.00.00	10	4000	800	>80	24V DC
LLX551.0.0.00.00	10	4000	800	>80	24V DC
LLX557.0.0.00.00	10	4000	800	>80	24V DC
LLX553.0.0.00.00	10	4000	800	>80	24V DC

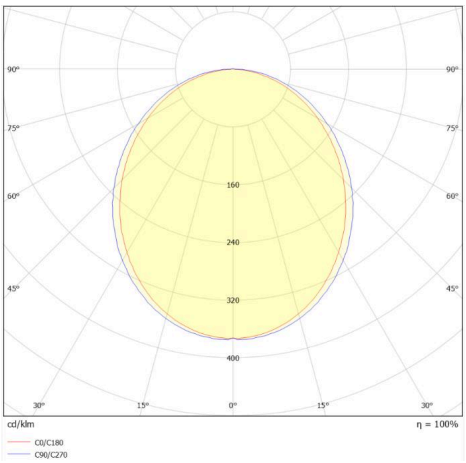


710
48
65