




# Akrobat

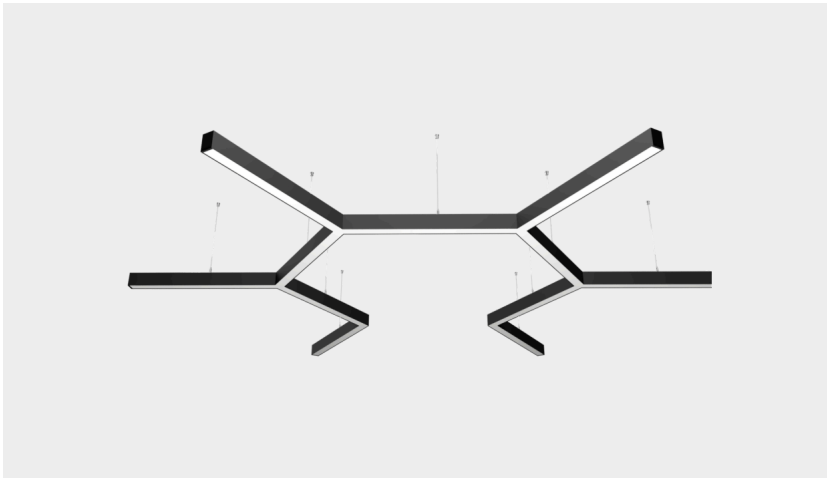

## Housing

Matt natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

## Optics

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

## Led

High-efficacy mid power LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime

## Driver

24Vdc external type. Constant voltage output driver with high efficiency.

## Operating Temperature Range

0 °C/+35 °C

## Options

Dimming via DALI

## Color

Matte natural anodized

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz
LLX546.0.0.00.00	10	4000	800	>80	24V DC
LLX547.0.0.00.00	10	4000	800	>80	24V DC
LLX548.0.0.00.00	10	4000	800	>80	24V DC
LLX549.0.0.00.00	10	4000	800	>80	24V DC
LLX550.0.0.00.00	10	4000	800	>80	24V DC
LLX551.0.0.00.00	10	4000	800	>80	24V DC
LLX557.0.0.00.00	10	4000	800	>80	24V DC
LLX553.0.0.00.00	10	4000	800	>80	24V DC

