




## G 6060 VLO-T

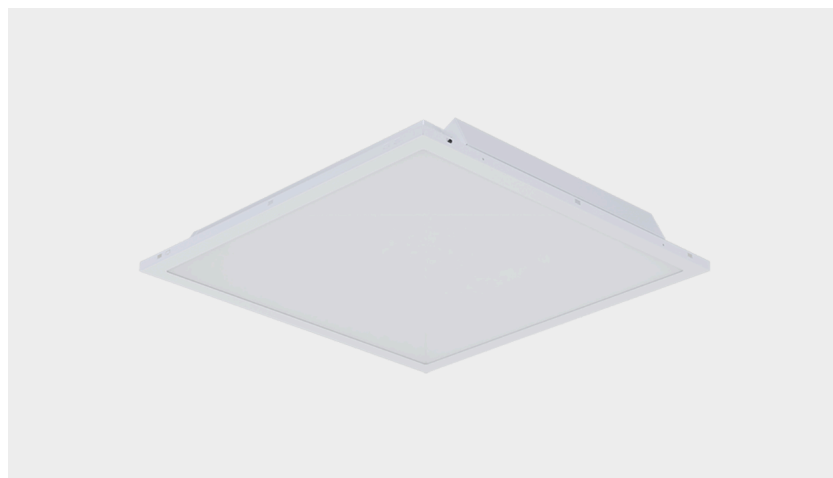

### Housing

Sheet steel body with electrostatic powder coating.

### Optics

Opal white polystyrene diffuser with lambertian light distribution.

### Led

High-efficiency LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

### Driver

Constant current output LED driver with high efficiency and  $Pf \geq 0.95$

### Options

- \* 1 or 3 hours emergency lighting kit
- \* Dimming via DALI



Ral 9016 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
GVLO-T. 6060.23.30	23	3000	2770	>80	220 - 240 / 50 - 60	3,2
GVLO-T. 6060.23.40	23	4000	2860	>80	220 - 240 / 50 - 60	3,2
GVLO-T. 6060.28.30	28	3000	3380	>80	220 - 240 / 50 - 60	3,2
GVLO-T. 6060.28.40	28	4000	3520	>80	220 - 240 / 50 - 60	3,2
GVLO-T. 6060.32.30	32	3000	3950	>80	220 - 240 / 50 - 60	3,2
GVLO-T. 6060.32.40	32	4000	4110	>80	220 - 240 / 50 - 60	3,2
GVLO-T. 6060.39.30	39	3000	4560	>80	220 - 240 / 50 - 60	3,2
GVLO-T. 6060.39.40	39	4000	4730	>80	220 - 240 / 50 - 60	3,2

