




DG 1005 FLR

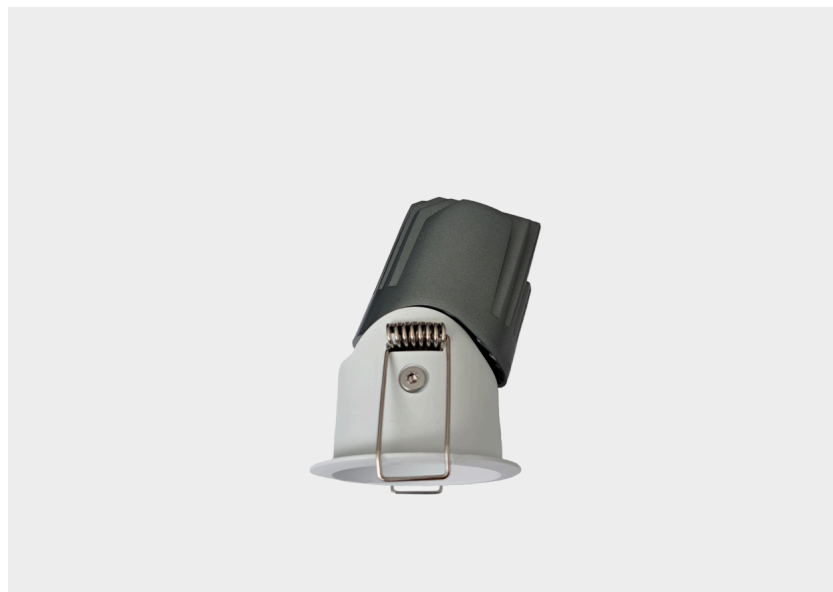

Housing

Aluminum injection frame with electrostatic powder coating and aluminum heatsink.

Optics

Highly efficient PMMA lens, designed specially for High Power LED.

Led

High-efficacy High Power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and pf >0,8.

Options

Dimming via DALI



Ral 9016

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) | Beam Angle |
|------------------------|-----------|---------|-------------------|-----|---------------------|-------------|-------------------|------------|
| DGFLR. 50.8.3.90.24 | 8,5 | 3000 | 270 | >90 | 220 - 240 / 50 - 60 | 0,07 | Ø45 | 24° |
| DGFLR. 50.8.4.90.24 | 8,5 | 4000 | 325 | >90 | 220 - 240 / 50 - 60 | 0,07 | Ø45 | 24° |
| DGFLR. 50.8.3.90.55 | 8,5 | 3000 | 340 | >90 | 220 - 240 / 50 - 60 | 0,07 | Ø45 | 55° |
| DGFLR. 50.8.4.90.55 | 8,5 | 4000 | 385 | >90 | 220 - 240 / 50 - 60 | 0,07 | Ø45 | 55° |

