




# DG 1005 FLR

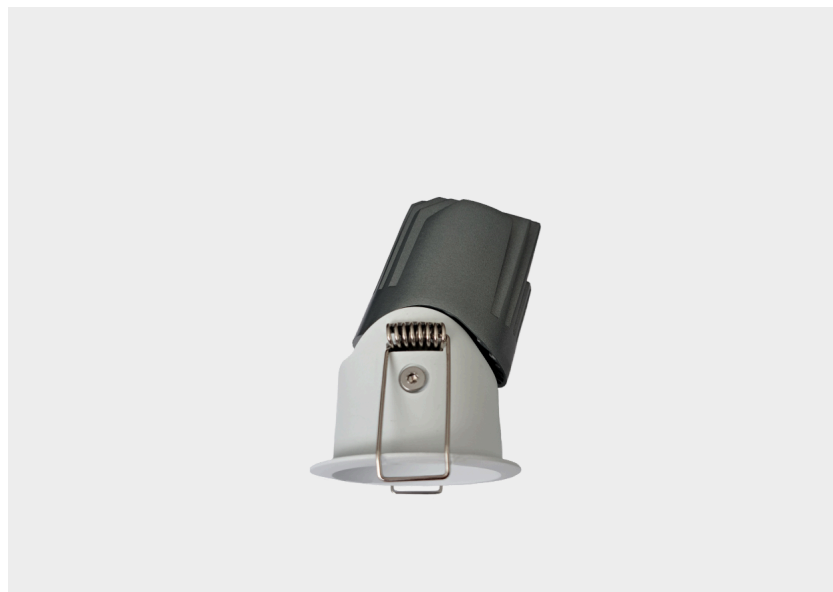

## Housing

Aluminum injection frame with electrostatic powder coating and aluminum heatsink.

## Optics

Highly efficient PMMA lens, designed specially for High Power LED.

## Led

High-efficacy High Power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and pf >0,8.

## Options

Dimming via DALI



Ral 9016

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)	Beam Angle
DGFLR. 50.8.3.90.24	8,5	3000	270	>90	220 - 240 / 50 - 60	0,07	Ø45	24°
DGFLR. 50.8.4.90.24	8,5	4000	325	>90	220 - 240 / 50 - 60	0,07	Ø45	24°
DGFLR. 50.8.3.90.55	8,5	3000	340	>90	220 - 240 / 50 - 60	0,07	Ø45	55°
DGFLR. 50.8.4.90.55	8,5	4000	385	>90	220 - 240 / 50 - 60	0,07	Ø45	55°

