# DS 1062 LOT+



**Housing**
Electrostatic matte powder painted aluminum.

**Optics**
Opal white diffuser with lambertian light distribution and high transmissivity.

**Led**
High-efficacy LED module with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.


**Driver**
Constant current output LED driver with high efficiency and Pf≥0.95


**Operating Temperature Range**0 °C/+35 °C

**Options**
1 or 3 hours emergency lighting kit
Dimming via DALI

Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) |
|---|---|---|---|---|---|---|
| DSLOT+.620.48.30 | 48 | 3000 | 6195 | >80 | 220 - 240 / 50 - 60 | 7,0 |
| DSLOT+.620.48.40 | 48 | 4000 | 6690 | >80 | 220 - 240 / 50 - 60 | 7,0 |
| DSLOT+.620.68.30 | 68 | 3000 | 8450 | >80 | 220 - 240 / 50 - 60 | 7,0 |
| DSLOT+.620.68.40 | 68 | 4000 | 9120 | >80 | 220 - 240 / 50 - 60 | 7,0 |

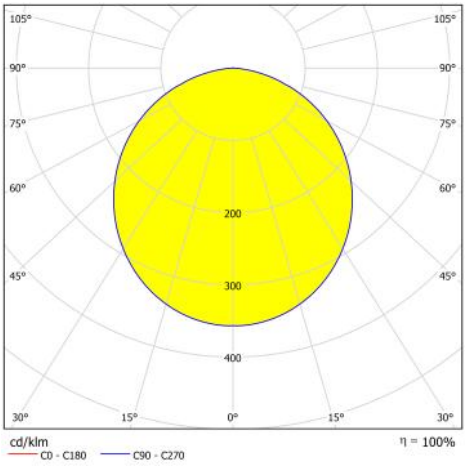


Ø620
100