# E 6060 HYM - RGBW



Hylum RGBW provides a very wide range of usage since it has the ability to change the light source. It can be easily installed with practical mounting parts and mounting method. As a product with IP protection; Since there are no bolts etc. connection parts on the visible surface, it does not disrupt the visual aesthetics and does not compromise on simplicity and elegance.

### Product

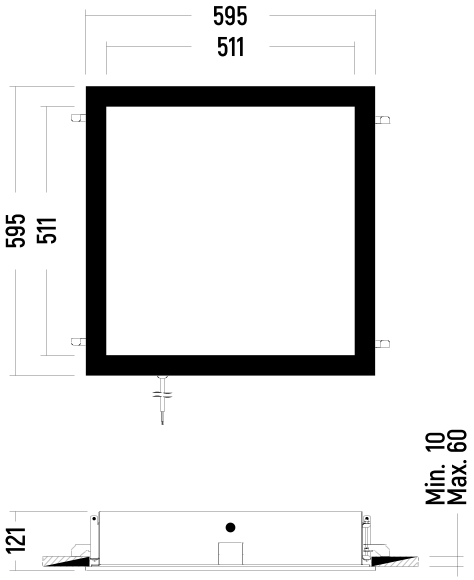
| | |
|---|---|
| Type | E 6060 HYM-RGBW |
| Type Code | EHYM.6060.92.RGB40.90 |
| Category | Indoor Lighting |
| Color | White (RAL 9016) |

### Technical Data

| | |
|---|---|
| Light Source | Mid Power LED |
| Power / Luminous flux | 35W / 2800 lm (White Channel)<br>92W (Total Watt) |
| Color temperature | RGB/4000K |
| Color rendering index | CRI>90 |
| Electrical protection class | CLASS I |
| Voltage | 220V/240V |
| Frequency | 50/60 Hz |
| Luminous flux tolerance | ±7% |
| Power consumption tolerance | ±7% |
| LED life | L90B50 > 100.000 h |

### Other Information

| | |
|---|---|
| IP protection | IP65/54 |
| Impact protection | IK08 |
| Weight | 11 kg |
| Dimensions (W x L x H) | 595mm x 595mm x 121mm |
| Optical protection | Tempered Glass |
| Body material | Antibacterial electrostatic powder paint<br>DKP sheet metal body and aluminum frame |
| Diffuser material | Micro prismatic acrylic diffuser that is resistant to UV rays, does not yellow, and provides homogeneous light distribution. |
| Working environment temperature | -25...+35 °C |


595
511
595
511
Min. 10
Max. 60
121