




# PLUS-T

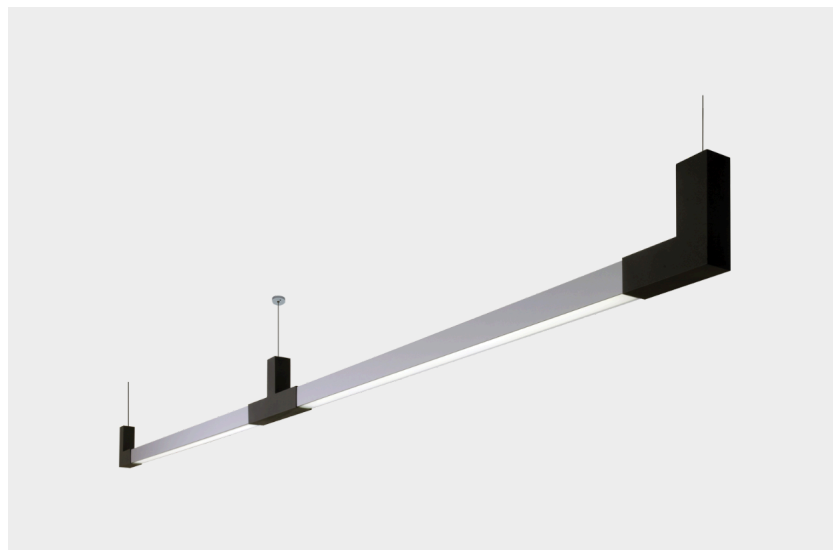

## Housing

Matte natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

## Optics

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

## Led

High-efficacy mid power LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and  $Pf \geq 0.95$


## Options

Dimming via DALI


## Color

Matte natural anodized

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	L1 (mm)	L2 (mm)	L3 (mm)
SPLT.3000.88.30	88	3000	7950	>80	220 - 240 / 50 - 60	6,2	1130	2990	1460
SPLT.3000.88.40	88	4000	8460	>80	220 - 240 / 50 - 60	6,2	1130	2990	1460
SPLT.3500.108.30	108	3000	9360	>80	220 - 240 / 50 - 60	7	1410	3550	1740
SPLT.3500.108.40	108	4000	9960	>80	220 - 240 / 50 - 60	7	1410	3550	1740
SDPLT.3000.88.30	88	3000	7950	>80	220 - 240 / 50 - 60	6	1130	2990	1460
SDPLT.3000.88.40	88	4000	8460	>80	220 - 240 / 50 - 60	6	1130	2990	1460
SDPLT.3500.108.30	108	3000	9360	>80	220 - 240 / 50 - 60	6,76	1410	3550	1740
SDPLT.3500.108.40	108	4000	9960	>80	220 - 240 / 50 - 60	6,76	1410	3550	1740

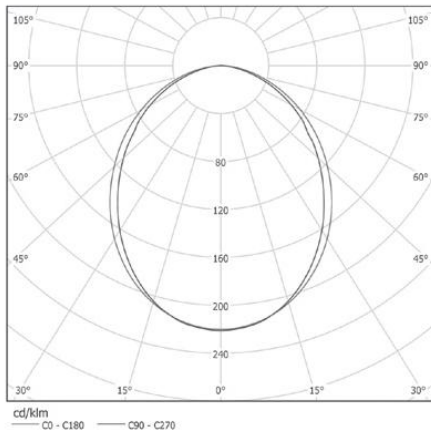

Suspended Type

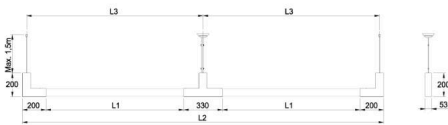

Surface mounted type

