




# PLUS GRID - 1

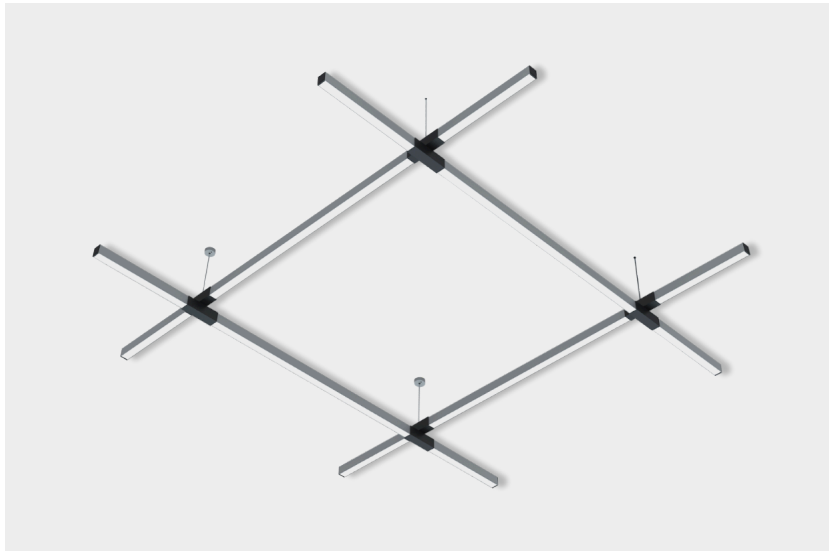

**Housing**

Matte natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

**Optics**

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

**Led**

High-efficacy mid power LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

**Driver**

Constant current output LED driver with high efficiency and P<sub>f</sub>≥0.95

**Options**

Dimming via DALI

**Color**

Matte natural anodized

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
SPLG.3030.436.30	436	3000	39340	>80	220 - 240 / 50 - 60	18
SPLG.3030.436.40	436	3000	41850	>80	220 - 240 / 50 - 60	18

