




PLUS GRID - 1

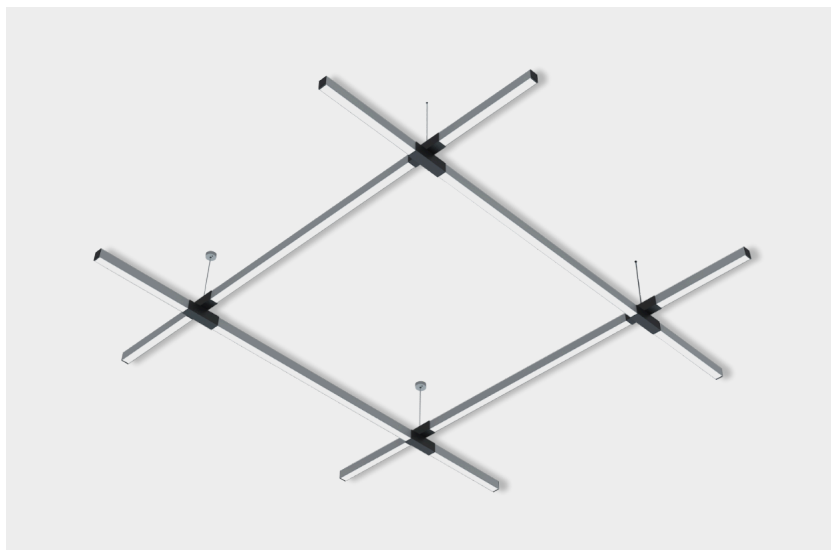

Housing

Matte natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

Optics

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

Led

High-efficacy mid power LED with CRI>80, achieving L90B50 \geq 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and $Pf \geq 0.95$

Options

Dimming via DALI

Color

Matte natural anodized

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) |
|------------------|-----------|---------|-------------------|-----|---------------------|-------------|
| SPLG.3030.436.30 | 436 | 3000 | 39340 | >80 | 220 - 240 / 50 - 60 | 18 |
| SPLG.3030.436.40 | 436 | 3000 | 41850 | >80 | 220 - 240 / 50 - 60 | 18 |

