




## PLUS GRID-2

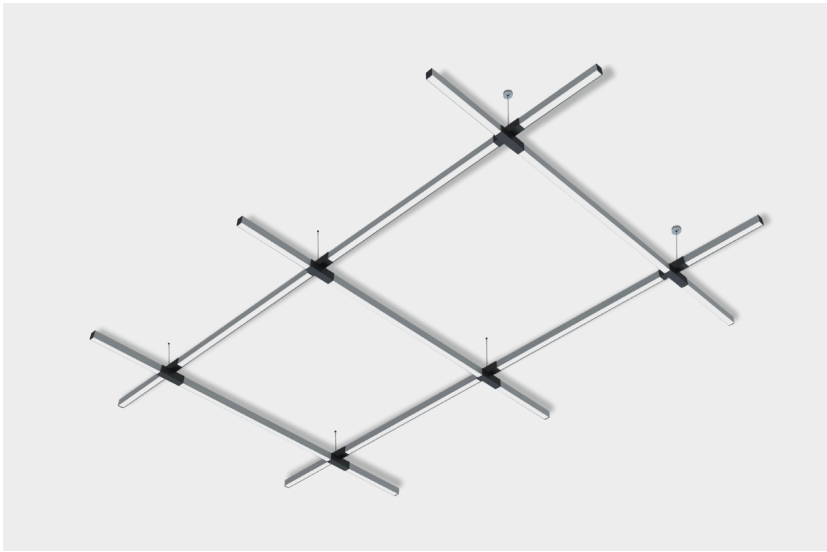

### Housing

Matte natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

### Optics

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

### Led

High-efficacy mid power LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

### Driver

Constant current output LED driver with high efficiency and  $Pf \geq 0.95$

### Options

Dimming via DALI

### Color

Matte natural anodized

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
SPLG.3045.633.30	633	3000	57720	>80	220 - 240 / 50 - 60	28
SPLG.3045.633.40	633	4000	60770	>80	220 - 240 / 50 - 60	28

