




PLUS GRID-4

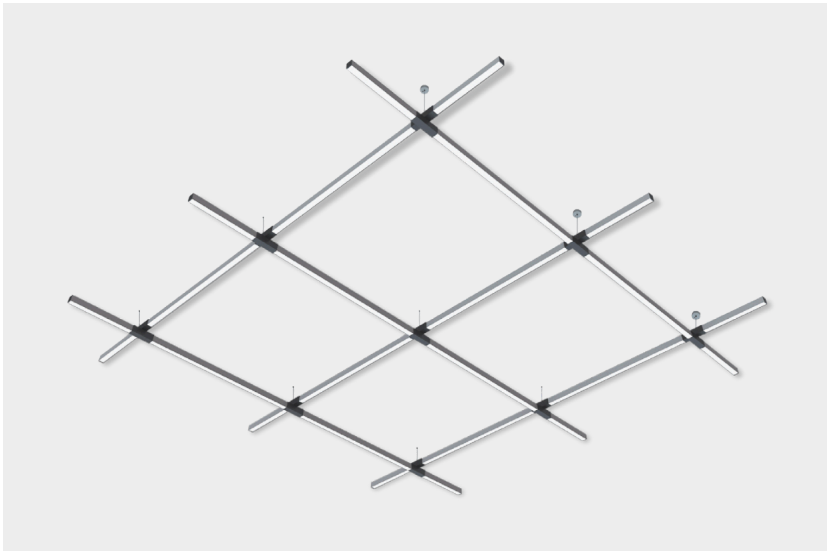

Housing

Matte natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

Optics

Opal, white, diffusing polycarbonate lens with lambertian light distribution.

Led

High-efficacy mid power LED with CRI>80, achieving L90B50 \geq 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and $Pf \geq 0.95$

Options

Dimming via DALI

Color

Matte natural anodized

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
SPLG. 4545.1104.30	1104	3000	90710	>80	220 - 240 / 50 - 60	43,2
SPLG. 4545.1104.40	1104	4000	96500	>80	220 - 240 / 50 - 60	43,2

