
PLUS GRID-4

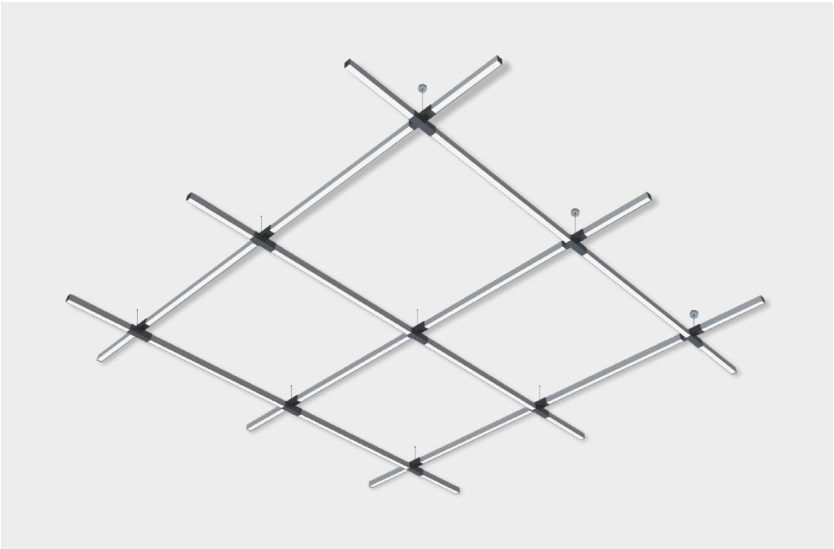

Housing
Matte natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic ceiling cup.

Optics
Opal, white, diffusing polycarbonate lens with lambertian light distribution.


Led
High-efficacy mid power LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.


Driver
Constant current output LED driver with high efficiency and Pf≥0.95

Options
Dimming via DALI

Color
Matte natural anodized

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
SPLG. 4545.1104.30	1104	3000	90710	>80	220 - 240 / 50 - 60	43,2
SPLG. 4545.1104.40	1104	4000	96500	>80	220 - 240 / 50 - 60	43,2

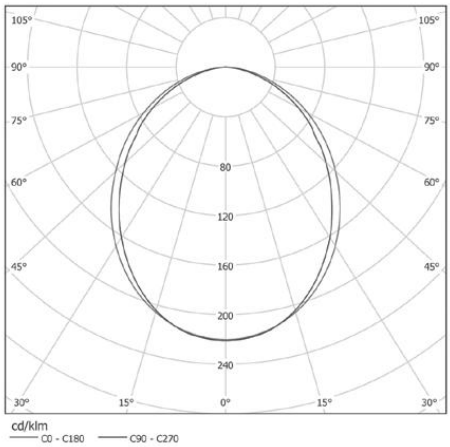

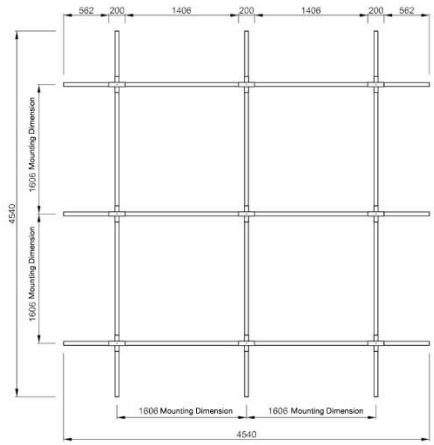
562
200
1406
200
1406
200
562
1606 Mounting Dimension
1606 Mounting Dimension
4540
1606 Mounting Dimension
1606 Mounting Dimension
4540