




Cove 1 - Frosted Led Bar

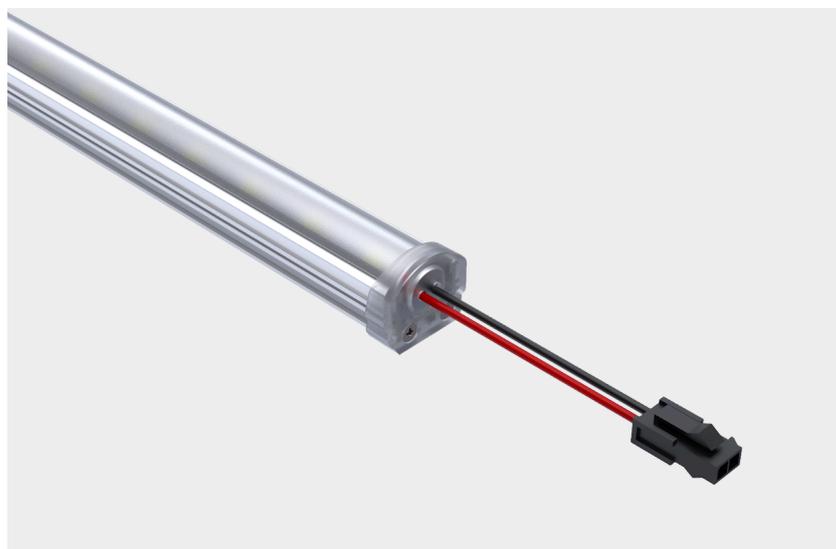

Housing

Matt natural anodized, aluminum extrusion profile and mounting accessories with plastic end cap.

Optics

Frosted diffusing polycarbonate lens with lambertian light distribution.

Led

High-efficacy mid power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

Driver

24Vdc external type. Constant voltage output driver with high efficiency.

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | L (mm) |
|-----------------------|-----------|---------|-------------------|-----|--------|-------------|--------|
| SDCVIB.135.2.30 | 2 | 3000 | 180 | >80 | 24V DC | 0,04 | 135 |
| SDCVIB.135.2.40 | 2 | 4000 | 190 | >80 | 24V DC | 0,04 | 135 |
| SDCVIB.260.4.30 | 4 | 3000 | 310 | >80 | 24V DC | 0,07 | 260 |
| SDCVIB.260.4.40 | 4 | 4000 | 330 | >80 | 24V DC | 0,07 | 260 |
| SDCVIB.505.8.30 | 8 | 3000 | 700 | >80 | 24V DC | 0,14 | 505 |
| SDCVIB.505.8.40 | 8 | 4000 | 745 | >80 | 24V DC | 0,14 | 505 |
| SDCVIB. 1000.16.30 | 16 | 3000 | 1405 | >80 | 24V DC | 0,28 | 1000 |
| SDCVIB. 1000.16.40 | 16 | 4000 | 1560 | >80 | 24V DC | 0,28 | 1000 |
| SDCVIB. 1245.20.30 | 20 | 3000 | 1780 | >80 | 24V DC | 0,34 | 1245 |
| SDCVIB. 1245.20.40 | 20 | 4000 | 1900 | >80 | 24V DC | 0,34 | 1245 |
| SDCVIB. 1495.24.30 | 24 | 3000 | 2145 | >80 | 24V DC | 0,41 | 1495 |
| SDCVIB. 1495.24.40 | 24 | 4000 | 2285 | >80 | 24V DC | 0,41 | 1495 |

