




## Cove 2 - Frosted Led Bar

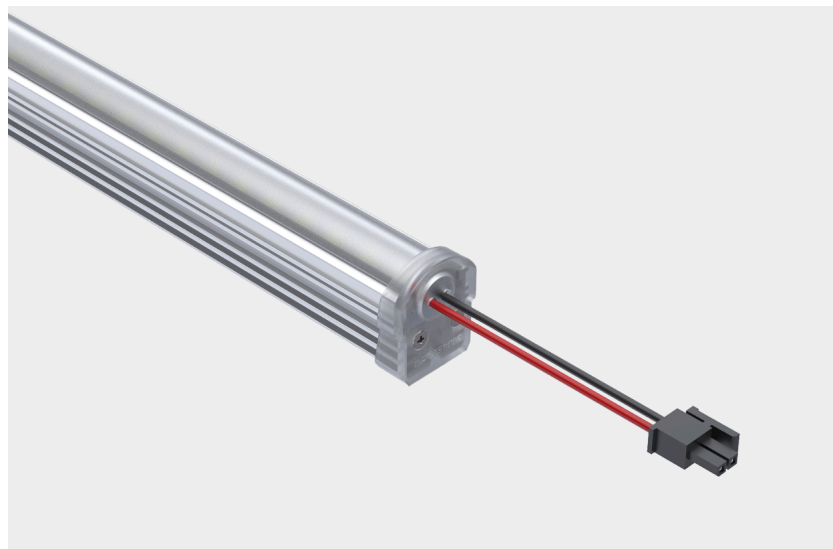

### Housing

Matt natural anodized, aluminum extrusion profile and stainless steel mounting accessories with plastic end cap.

### Optics

Frosted diffusing polycarbonate lens with lambertian light distribution.

### Led

High-efficacy mid power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

### Driver

24Vdc external type. Constant voltage output driver with high efficiency.

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	L (mm)
SDCVKB.135.3.30	3	3000	275	>80	24V DC	0,06	135
SDCVKB.135.3.40	3	4000	295	>80	24V DC	0,06	135
SDCVKB.260.6.30	6	3000	560	>80	24V DC	0,10	260
SDCVKB.260.6.40	6	4000	595	>80	24V DC	0,10	260
SDCVKB.505.12.30	12	3000	1130	>80	24V DC	0,19	505
SDCVKB.505.12.40	12	4000	1225	>80	24V DC	0,19	505
SDCVKB. 1000.24.30	24	3000	2330	>80	24V DC	0,37	1000
SDCVKB. 1000.24.40	24	4000	2535	>80	24V DC	0,37	1000
SDCVKB. 1245.30.30	30	3000	2835	>80	24V DC	0,46	1245
SDCVKB. 1245.30.40	30	4000	3020	>80	24V DC	0,46	1245
SDCVKB. 1495.36.30	36	3000	3410	>80	24V DC	0,55	1495
SDCVKB. 1495.36.40	36	4000	3625	>80	24V DC	0,55	1495

