DG 1020 MON



Housing
Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

OpticsOpal white polystyrene diffuser with lambertian light distribution.

LedHigh-efficacy LED module with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.


DriverConstant current output LED driver with high efficiency and pf >0,9.


Operating Temperature Range0 °C/+35 °C

Options
* 1 or 3 hours emergency lighting kit
* Dimming via DALI

Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
DGMON.200.14.30	14	3000	1270	>80	220 - 240 / 50 - 60	0,8	Ø175
DGMON.200.14.40	14	4000	1360	>80	220 - 240 / 50 - 60	0,8	Ø175
DGMON.200.20.30	20	3000	1640	>80	220 - 240 / 50 - 60	0,8	Ø175
DGMON.200.20.40	20	4000	1770	>80	220 - 240 / 50 - 60	0,8	Ø175

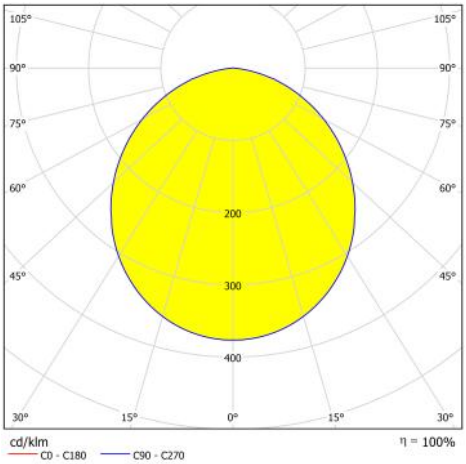

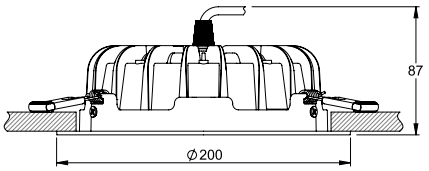
87
ϕ200