




DG 2035 OPK

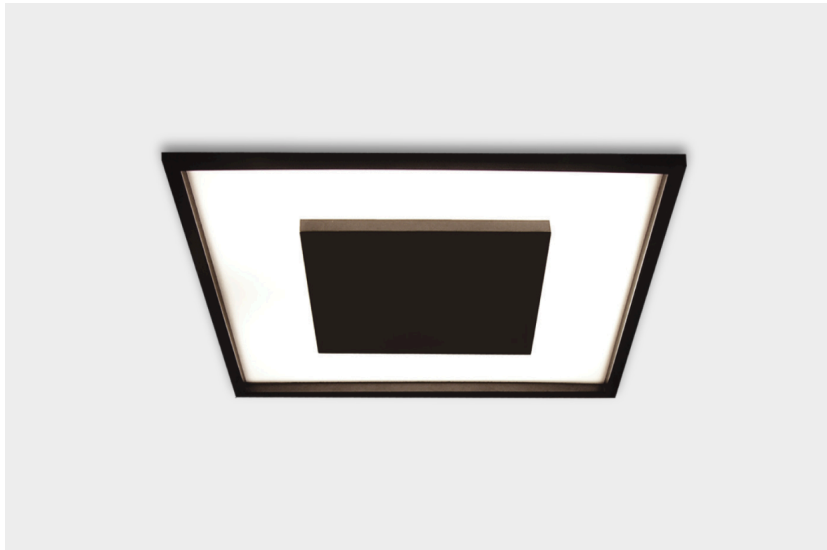

Housing

Sheet steel with electrostatic powder coating.

Optics Prism structured opal white diffuser with lambertian light distribution and high transmissivity.

Led

High-efficacy LED module with CRI>80, achieving L90B50 \geq 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and $Pf \geq 0.95$

Options

1 or 3 hours emergency lighting kit
Dimming via DALI



Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) |
|----------------------|-----------|---------|-------------------|-----|---------------------|-------------|-------------------|
| DGOPK. 3535.28.30 | 28 | 3000 | 1800 | >80 | 220 - 240 / 50 - 60 | 2,8 | 335x335 |
| DGOPK. 3535.28.40 | 28 | 4000 | 1920 | >80 | 220 - 240 / 50 - 60 | 2,8 | 335x335 |

