




# DG 2023 KLD

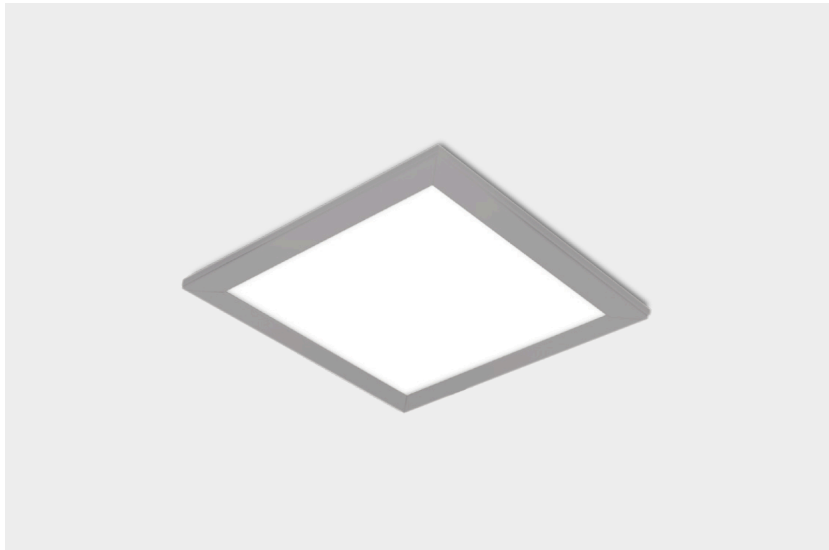

## Housing

Sheet steel with electrostatic powder coating.

**Optics** Opal white polystyrene diffuser with lambertian light distribution.

## Led


High-efficacy LED module with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and pf >0,9

## Options

- \* 1 or 3 hours emergency lighting kit
- \* Dimming via DALI



Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
DGKLD.2222.18.30	18	3000	1090	>80	220 - 240 / 50 - 60	1,4	210x210
DGKLD.2222.18.40	18	4000	1190	>80	220 - 240 / 50 - 60	1,4	210x210
DGKLD.1616.13.30	13	3000	660	>80	220 - 240 / 50 - 60	0,7	140x140
DGKLD.1616.13.40	13	4000	720	>80	220 - 240 / 50 - 60	0,7	140x140

