




DG 2023 KLD

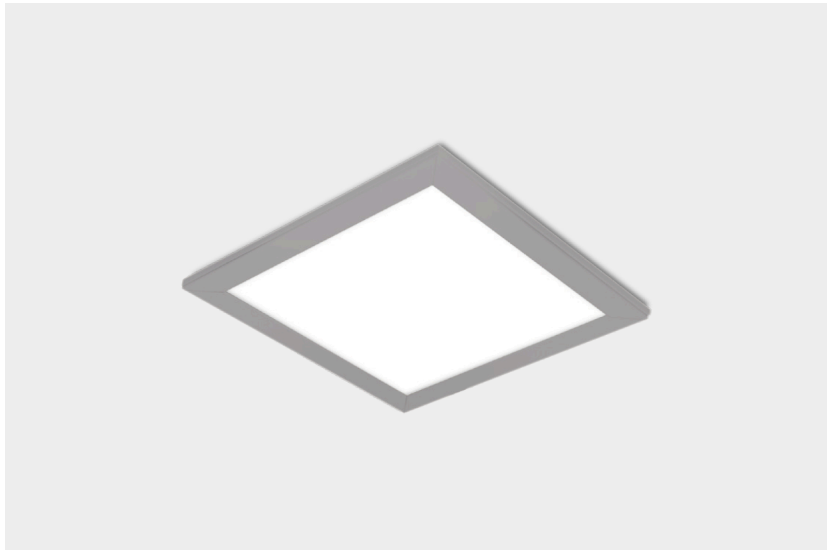

Housing

Sheet steel with electrostatic powder coating.

Optics Opal white polystyrene diffuser with lambertian light distribution.

Led

High-efficacy LED module with CRI>80, achieving L90B50 \geq 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and pf >0,9

Options

- * 1 or 3 hours emergency lighting kit
- * Dimming via DALI



Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) |
|------------------|-----------|---------|-------------------|-----|---------------------|-------------|-------------------|
| DGKLD.2023.18.30 | 18 | 3000 | 1090 | >80 | 220 - 240 / 50 - 60 | 1,4 | 210x210 |
| DGKLD.2023.18.40 | 18 | 4000 | 1190 | >80 | 220 - 240 / 50 - 60 | 1,4 | 210x210 |

