




DG 2016 KLD

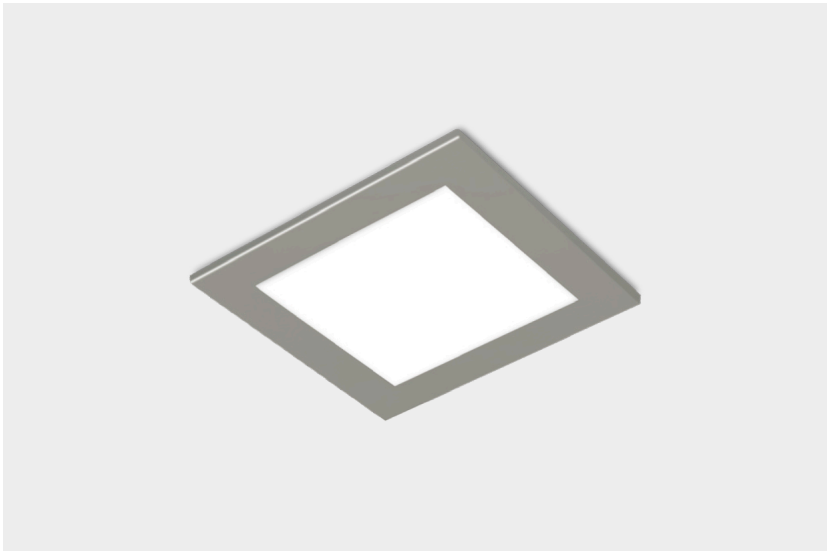

Housing

Sheet steel with electrostatic powder coating.

Optics Opal white polystyrene diffuser with lambertian light distribution.

Led

High-efficacy LED module with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency and pf >0,9.

Options

- * 1 or 3 hours emergency lighting kit
- * Dimming via DALI



Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) |
|------------------|-----------|---------|-------------------|-----|---------------------|-------------|-------------------|
| DGKLD.1616.13.30 | 13 | 3000 | 660 | >80 | 220 - 240 / 50 - 60 | 0,7 | 140x140 |
| DGKLD.1616.13.40 | 13 | 4000 | 720 | >80 | 220 - 240 / 50 - 60 | 0,7 | 140x140 |

