



STARK SMALL



Housing Aluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

Optics Special design, clear, acrylic (PMMA) optic lens

Glass 4mm clear tempered glass


LED High-power LED with high efficacy

Driver Constant current driver with high efficiency


Ambient Temperature
-40 °C/+50 °C

Impact Resistance
Glass : IK08
Body : IK10


| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | lm/W |
|-------------------|-----------|---------|-------------------|-----|---------------------|-------------|------|
| BSTA.450.36.40.L1 | 36 | 4000 | 5580 | >70 | 220 - 240 / 50 - 60 | 6,3 | 153 |
| BSTA.450.55.40.L1 | 55 | 4000 | 8260 | >70 | 220 - 240 / 50 - 60 | 6,3 | 150 |
| BSTA.450.62.40.L1 | 62 | 4000 | 9070 | >70 | 220 - 240 / 50 - 60 | 6,3 | 147 |
| BSTA.450.79.40.L1 | 79 | 4000 | 10950 | >70 | 220 - 240 / 50 - 60 | 6,3 | 139 |
| BSTA.450.36.40.L2 | 36 | 4000 | 5600 | >70 | 220 - 240 / 50 - 60 | 6,3 | 154 |
| BSTA.450.55.40.L2 | 55 | 4000 | 8230 | >70 | 220 - 240 / 50 - 60 | 6,3 | 149 |
| BSTA.450.62.40.L2 | 62 | 4000 | 8990 | >70 | 220 - 240 / 50 - 60 | 6,3 | 146 |
| BSTA.450.79.40.L2 | 79 | 4000 | 10830 | >70 | 220 - 240 / 50 - 60 | 6,3 | 137 |
| BSTA.450.36.40.L3 | 36 | 4000 | 5500 | >70 | 220 - 240 / 50 - 60 | 6,3 | 151 |
| BSTA.450.55.40.L3 | 55 | 4000 | 8360 | >70 | 220 - 240 / 50 - 60 | 6,3 | 152 |
| BSTA.450.62.40.L3 | 62 | 4000 | 9050 | >70 | 220 - 240 / 50 - 60 | 6,3 | 147 |
| BSTA.450.79.40.L3 | 79 | 4000 | 10800 | >70 | 220 - 240 / 50 - 60 | 6,3 | 137 |
| BSTA.450.36.40.L4 | 36 | 4000 | 5560 | >70 | 220 - 240 / 50 - 60 | 6,3 | 153 |
| BSTA.450.55.40.L4 | 55 | 4000 | 8280 | >70 | 220 - 240 / 50 - 60 | 6,3 | 150 |
| BSTA.450.62.40.L4 | 62 | 4000 | 9120 | >70 | 220 - 240 / 50 - 60 | 6,3 | 148 |
| BSTA.450.79.40.L4 | 79 | 4000 | 10750 | >70 | 220 - 240 / 50 - 60 | 6,3 | 136 |
| BSTA.450.36.40.L6 | 36 | 4000 | 5350 | >70 | 220 - 240 / 50 - 60 | 6,3 | 149 |
| BSTA.450.55.40.L6 | 55 | 4000 | 8110 | >70 | 220 - 240 / 50 - 60 | 6,3 | 147 |
| BSTA.450.62.40.L6 | 62 | 4000 | 8890 | >70 | 220 - 240 / 50 - 60 | 6,3 | 144 |
| BSTA.450.79.40.L6 | 79 | 4000 | 10450 | >70 | 220 - 240 / 50 - 60 | 6,3 | 132 |

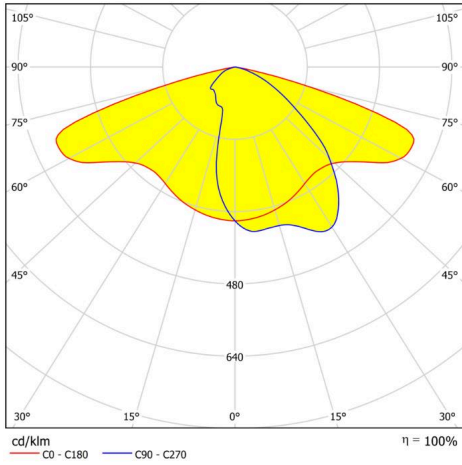


BSTA.450.79.40.L1

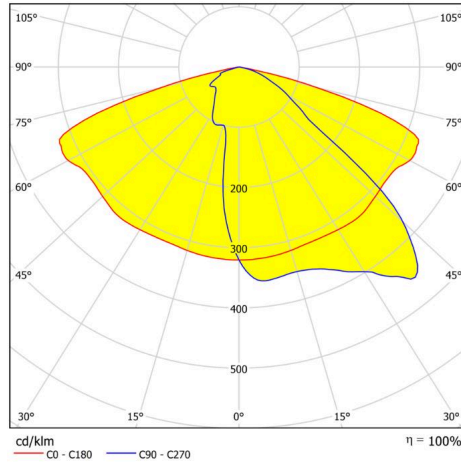


BSTA.450.79.40.L2

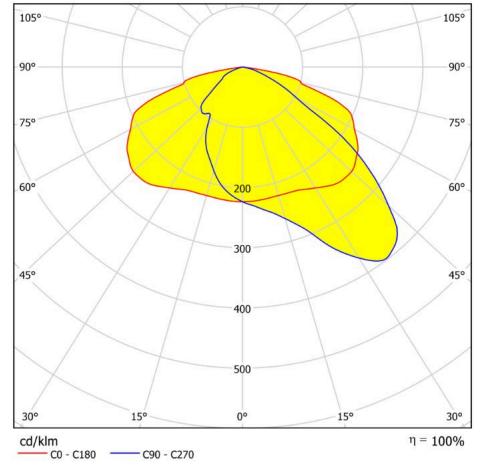

BSTA.450.79.40.L3

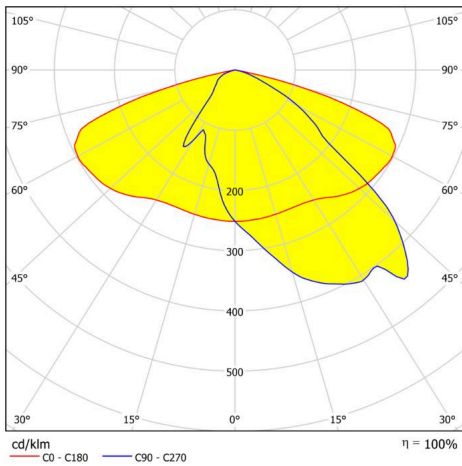

BSTA.450.79.40.L4

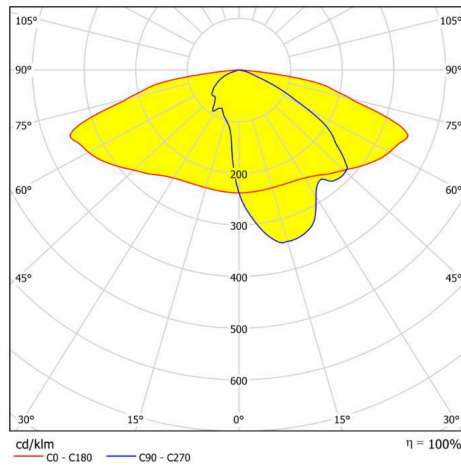

BSTA.450.79.40.L6

