



# STARK SMALL



**Housing** Aluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

**Optics** Special design, clear, acrylic (PMMA) optic lens

**Glass** 4mm clear tempered glass


**LED** High-power LED with high efficacy

**Driver** Constant current driver with high efficiency


**Ambient Temperature**  
-40 °C/+50 °C

**Impact Resistance**  
Glass : IK08  
Body : IK10


Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	lm/W
BSTA.450.36.40.L1	36	4000	5580	>70	220 - 240 / 50 - 60	6,3	153
BSTA.450.55.40.L1	55	4000	8260	>70	220 - 240 / 50 - 60	6,3	150
BSTA.450.62.40.L1	62	4000	9070	>70	220 - 240 / 50 - 60	6,3	147
BSTA.450.79.40.L1	79	4000	10950	>70	220 - 240 / 50 - 60	6,3	139
BSTA.450.36.40.L2	36	4000	5600	>70	220 - 240 / 50 - 60	6,3	154
BSTA.450.55.40.L2	55	4000	8230	>70	220 - 240 / 50 - 60	6,3	149
BSTA.450.62.40.L2	62	4000	8990	>70	220 - 240 / 50 - 60	6,3	146
BSTA.450.79.40.L2	79	4000	10830	>70	220 - 240 / 50 - 60	6,3	137
BSTA.450.36.40.L3	36	4000	5500	>70	220 - 240 / 50 - 60	6,3	151
BSTA.450.55.40.L3	55	4000	8360	>70	220 - 240 / 50 - 60	6,3	152
BSTA.450.62.40.L3	62	4000	9050	>70	220 - 240 / 50 - 60	6,3	147
BSTA.450.79.40.L3	79	4000	10800	>70	220 - 240 / 50 - 60	6,3	137
BSTA.450.36.40.L4	36	4000	5560	>70	220 - 240 / 50 - 60	6,3	153
BSTA.450.55.40.L4	55	4000	8280	>70	220 - 240 / 50 - 60	6,3	150
BSTA.450.62.40.L4	62	4000	9120	>70	220 - 240 / 50 - 60	6,3	148
BSTA.450.79.40.L4	79	4000	10750	>70	220 - 240 / 50 - 60	6,3	136
BSTA.450.36.40.L6	36	4000	5350	>70	220 - 240 / 50 - 60	6,3	149
BSTA.450.55.40.L6	55	4000	8110	>70	220 - 240 / 50 - 60	6,3	147
BSTA.450.62.40.L6	62	4000	8890	>70	220 - 240 / 50 - 60	6,3	144
BSTA.450.79.40.L6	79	4000	10450	>70	220 - 240 / 50 - 60	6,3	132

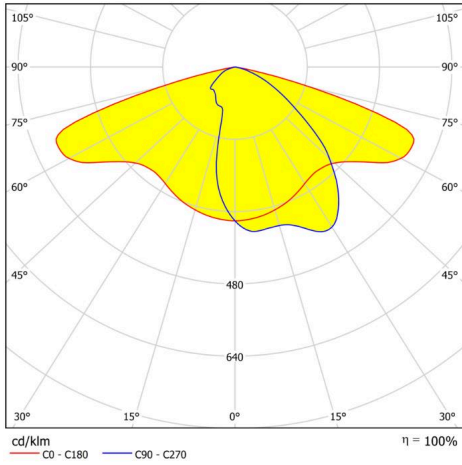


BSTA.450.79.40.L1

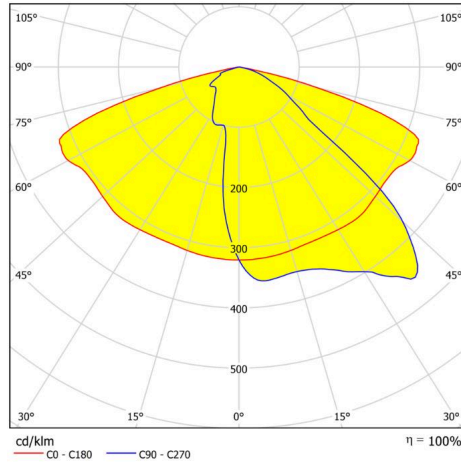


BSTA.450.79.40.L2

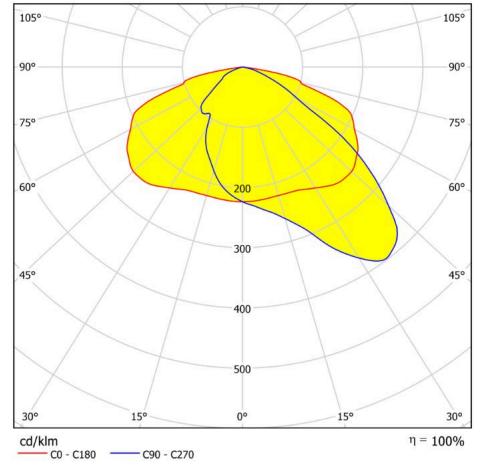

BSTA.450.79.40.L3

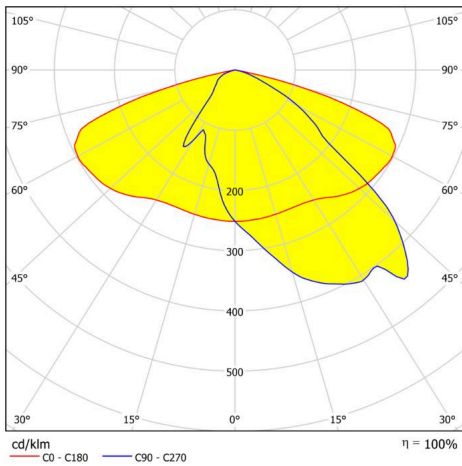

BSTA.450.79.40.L4

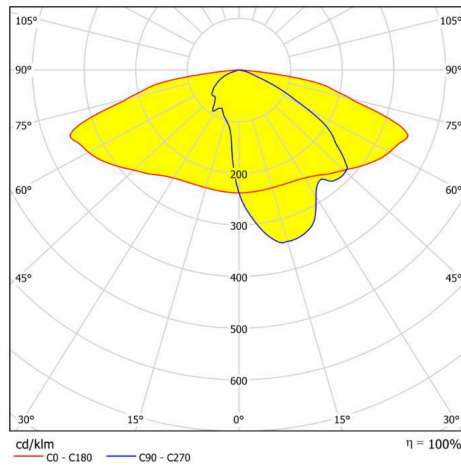

BSTA.450.79.40.L6

