



STARK SMALL



Housing Aluminium injection with electrostatic powder coating and air valve (ventile), monoblok silikon gasket

Optics Special design, clear, acrylic (PMMA) optic lens

Glass 4mm clear tempered glass


LED High-power LED with high efficacy

Driver Constant current driver with high efficiency


Ambient Temperature
-40 °C/+50 °C

Impact Resistance
Glass : IK08
Body : IK10


Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	lm/W
BSTA.450.36.40.L1	36	4000	5580	>70	220 - 240 / 50 - 60	6,3	153
BSTA.450.55.40.L1	55	4000	8260	>70	220 - 240 / 50 - 60	6,3	150
BSTA.450.62.40.L1	62	4000	9070	>70	220 - 240 / 50 - 60	6,3	147
BSTA.450.79.40.L1	79	4000	10950	>70	220 - 240 / 50 - 60	6,3	139
BSTA.450.36.40.L2	36	4000	5600	>70	220 - 240 / 50 - 60	6,3	154
BSTA.450.55.40.L2	55	4000	8230	>70	220 - 240 / 50 - 60	6,3	149
BSTA.450.62.40.L2	62	4000	8990	>70	220 - 240 / 50 - 60	6,3	146
BSTA.450.79.40.L2	79	4000	10830	>70	220 - 240 / 50 - 60	6,3	137
BSTA.450.36.40.L3	36	4000	5500	>70	220 - 240 / 50 - 60	6,3	151
BSTA.450.55.40.L3	55	4000	8360	>70	220 - 240 / 50 - 60	6,3	152
BSTA.450.62.40.L3	62	4000	9050	>70	220 - 240 / 50 - 60	6,3	147
BSTA.450.79.40.L3	79	4000	10800	>70	220 - 240 / 50 - 60	6,3	137
BSTA.450.36.40.L4	36	4000	5560	>70	220 - 240 / 50 - 60	6,3	153
BSTA.450.55.40.L4	55	4000	8280	>70	220 - 240 / 50 - 60	6,3	150
BSTA.450.62.40.L4	62	4000	9120	>70	220 - 240 / 50 - 60	6,3	148
BSTA.450.79.40.L4	79	4000	10750	>70	220 - 240 / 50 - 60	6,3	136
BSTA.450.36.40.L6	36	4000	5350	>70	220 - 240 / 50 - 60	6,3	149
BSTA.450.55.40.L6	55	4000	8110	>70	220 - 240 / 50 - 60	6,3	147
BSTA.450.62.40.L6	62	4000	8890	>70	220 - 240 / 50 - 60	6,3	144
BSTA.450.79.40.L6	79	4000	10450	>70	220 - 240 / 50 - 60	6,3	132

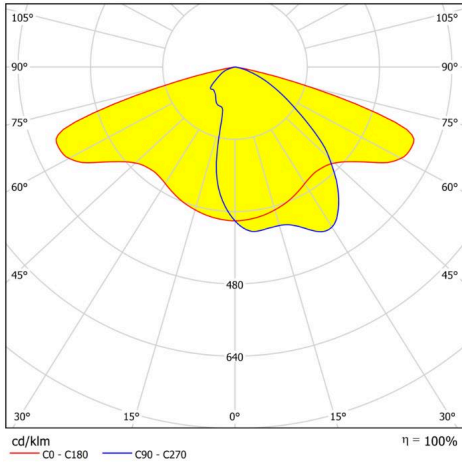


BSTA.450.79.40.L1

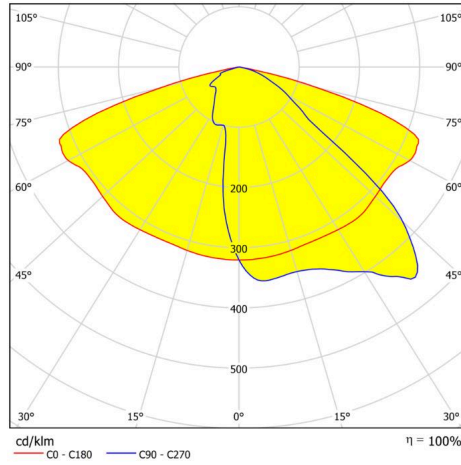


BSTA.450.79.40.L2

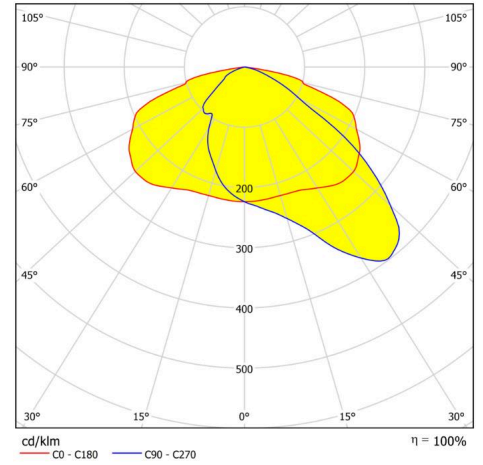

BSTA.450.79.40.L3

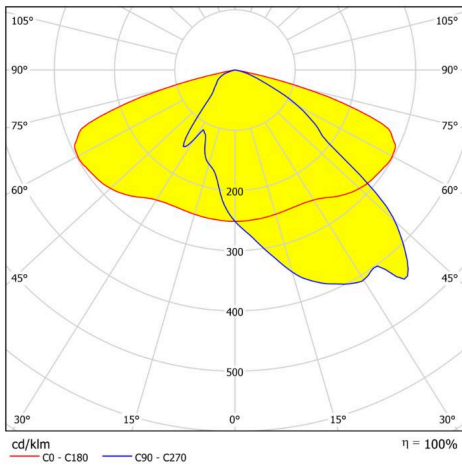

BSTA.450.79.40.L4

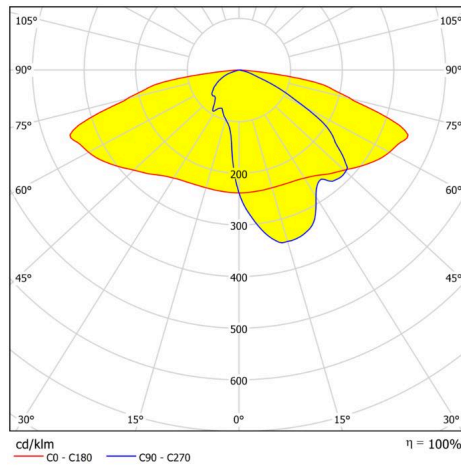

BSTA.450.79.40.L6

