# DS 1016 MON



**Housing**
Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

**Optics**
Opal white polystyrene diffuser with lambertian light distribution.

**Led**
High-efficacy Mid power LED module with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.


**Driver**
Constant current output LED driver with high efficiency and Pf≥0.95

**Operating Temperature Range**0 °C/+35 °C

**Options**
Dimming via DALI

Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) |
|---|---|---|---|---|---|---|
| DSMON.187.9.40 | 9 | 4000 | 795 | >80 | 220 - 240 / 50 - 60 | 0,9 |
| DSMON.187.9.30 | 9 | 3000 | 740 | >80 | 220 - 240 / 50 - 60 | 0,9 |
| DSMON.187.13.30 | 13 | 3000 | 975 | >80 | 220 - 240 / 50 - 60 | 0,9 |
| DSMON.187.13.40 | 13 | 4000 | 1050 | >80 | 220 - 240 / 50 - 60 | 0,9 |

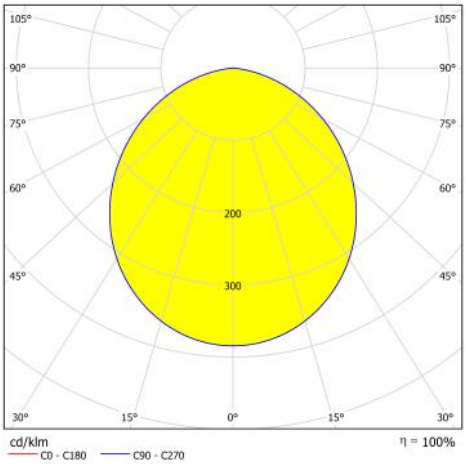


115
∅187