DG 2011 SAK



Housing
Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

Optics
Highly efficient PMMA lens, designed specially for High Power LED.

Led
High-efficacy High Power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.


Driver
Constant current output LED driver with high efficiency and pf >0,8.

Options
1 or 3 hours emergency lighting kit
Dimming via DALI
IP44/20 can be produced


Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)	Beam Angle
DGSAK. 110.6.30.25	6	3000	495	>80	220 - 240 / 50 - 60	0,42	95x95	25°
DGSAK. 110.6.40.25	6	4000	550	>80	220 - 240 / 50 - 60	0,42	95x95	25°
DGSAK. 110.6.30.35	6	3000	505	>80	220 - 240 / 50 - 60	0,42	95x95	35°
DGSAK. 110.6.40.35	6	4000	560	>80	220 - 240 / 50 - 60	0,42	95x95	35°
DGSAK. 110.6.30.60	6	3000	475	>80	220 - 240 / 50 - 60	0,42	95x95	60°
DGSAK. 110.6.40.60	6	4000	530	>80	220 - 240 / 50 - 60	0,42	95x95	60°
DGSAK. 110.8.30.25	8	3000	660	>80	220 - 240 / 50 - 60	0,42	95x95	25°
DGSAK. 110.8.40.25	8	4000	700	>80	220 - 240 / 50 - 60	0,42	95x95	25°
DGSAK. 110.8.30.35	8	3000	660	>80	220 - 240 / 50 - 60	0,42	95x95	35°
DGSAK. 110.8.40.35	8	4000	740	>80	220 - 240 / 50 - 60	0,42	95x95	35°
DGSAK. 110.8.30.60	8	3000	620	>80	220 - 240 / 50 - 60	0,42	95x95	60°
DGSAK. 110.8.40.60	8	4000	690	>80	220 - 240 / 50 - 60	0,42	95x95	60°
DGSAK. 110.11.30.25	11	3000	880	>80	220 - 240 / 50 - 60	0,42	95x95	25°
DGSAK. 110.11.40.25	11	4000	970	>80	220 - 240 / 50 - 60	0,42	95x95	25°


Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)	Beam Angle
DGSAK. 110.11.30.35	11	3000	860	>80	220 - 240 / 50 - 60	0,42	95x95	35°
DGSAK. 110.11.40.35	11	4000	955	>80	220 - 240 / 50 - 60	0,42	95x95	35°
DGSAK. 110.11.30.60	11	3000	820	>80	220 - 240 / 50 - 60	0,42	95x95	60°
DGSAK. 110.11.40.60	11	4000	910	>80	220 - 240 / 50 - 60	0,42	95x95	60°
DGSAK. 110.13.30.25	13	3000	1256	>80	220 - 240 / 50 - 60	0,42	95x95	25°
DGSAK. 110.13.40.25	13	4000	1350	>80	220 - 240 / 50 - 60	0,42	95x95	25°
DGSAK. 110.13.30.35	13	3000	1210	>80	220 - 240 / 50 - 60	0,42	95x95	35°
DGSAK. 110.13.40.35	13	4000	1313	>80	220 - 240 / 50 - 60	0,42	95x95	35°
DGSAK. 110.13.30.60	13	3000	1185	>80	220 - 240 / 50 - 60	0,42	95x95	60°
DGSAK. 110.13.40.60	13	4000	1280	>80	220 - 240 / 50 - 60	0,42	95x95	60°

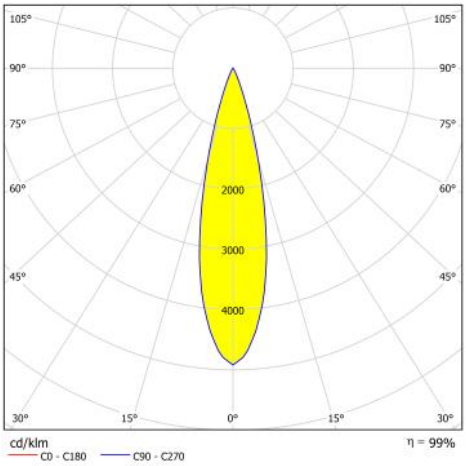


DSSAK.110.11.40.25

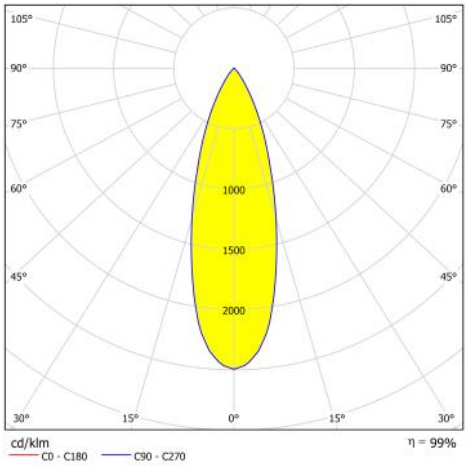


DGMOT.160.27.40.40

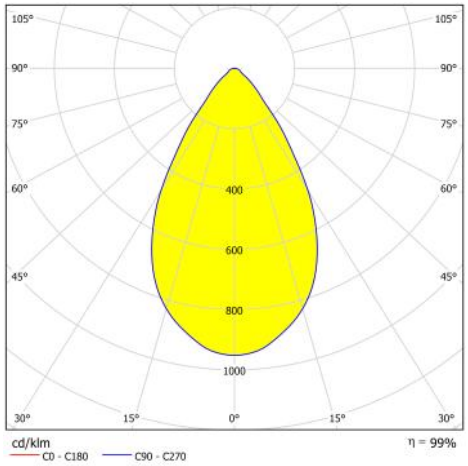

DSSAK.110.11.40.60


106
120
110 x 110

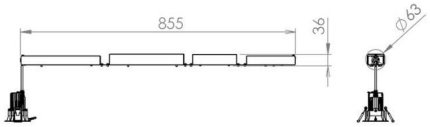
855
36
Ø83