# DG 2008 SAK



**Housing**
Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

**Optics**
Highly efficient PMMA lens, designed specially for High Power LED.

**Led**
High-efficacy High Power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.


**Driver**
Constant current output LED driver with high efficiency and pf >0,8.

**Options**
Dimming via DALI
IP44/20 can be produced


Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) | Beam Angle |
|---|---|---|---|---|---|---|---|---|
| DGSAK. 080.6.30.25 | 6 | 3000 | 495 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 25° |
| DGSAK. 080.6.40.25 | 6 | 4000 | 550 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 25° |
| DGSAK. 080.6.30.35 | 6 | 3000 | 505 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 35° |
| DGSAK. 080.6.40.35 | 6 | 4000 | 560 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 35° |
| DGSAK. 080.6.30.60 | 6 | 3000 | 475 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 60° |
| DGSAK. 080.6.40.60 | 6 | 4000 | 530 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 60° |
| DGSAK. 080.8.30.25 | 8 | 3000 | 660 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 25° |
| DGSAK. 080.8.40.25 | 8 | 4000 | 700 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 25° |
| DGSAK. 080.8.30.35 | 8 | 3000 | 660 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 35° |
| DGSAK. 080.8.40.35 | 8 | 4000 | 740 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 35° |
| DGSAK. 080.8.30.60 | 8 | 3000 | 620 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 60° |
| DGSAK. 080.8.40.60 | 8 | 4000 | 690 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 60° |
| DGSAK. 080.11.30.25 | 11 | 3000 | 880 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 25° |
| DGSAK. 080.11.40.25 | 11 | 4000 | 970 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 25° |
| DGSAK. | 11 | 3000 | 860 | >80 | 220 - 240 / 50 - | 0,32 | 70x70 | 35° |


| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) | Beam Angle |
|---|---|---|---|---|---|---|---|---|
| 080.11.30.35 | 11 | 3000 | 860 | >80 | 60 | 0,32 | 70x70 | 35° |
| DGSAK. 080.11.40.35 | 11 | 4000 | 955 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 35° |
| DGSAK. 080.11.30.60 | 11 | 3000 | 820 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 60° |
| DGSAK. 080.11.40.60 | 11 | 4000 | 910 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 60° |
| DGSAK. 080.13.30.25 | 13 | 3000 | 1290 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 25° |
| DGSAK. 080.13.40.25 | 13 | 4000 | 1379 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 25° |
| DGSAK. 080.13.30.35 | 13 | 3000 | 1250 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 35° |
| DGSAK. 080.13.40.35 | 13 | 4000 | 1325 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 35° |
| DGSAK. 080.13.30.60 | 13 | 3000 | 1211 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 60° |
| DGSAK. 080.13.40.60 | 13 | 4000 | 1280 | >80 | 220 - 240 / 50 - 60 | 0,32 | 70x70 | 60° |

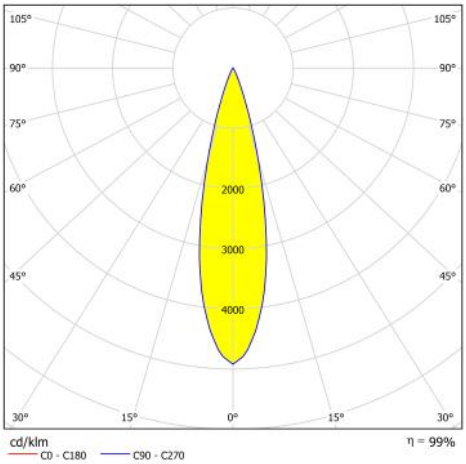

DSSAK.110.11.40.25

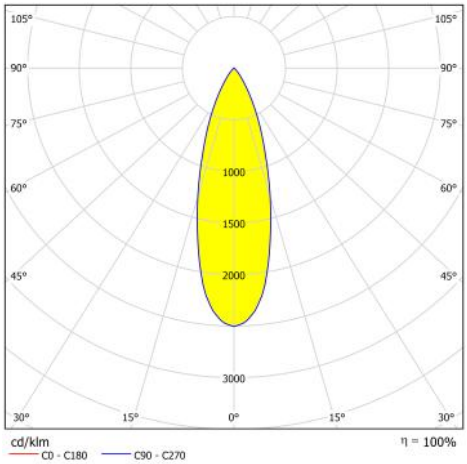

DGSAK.080.11.40.35

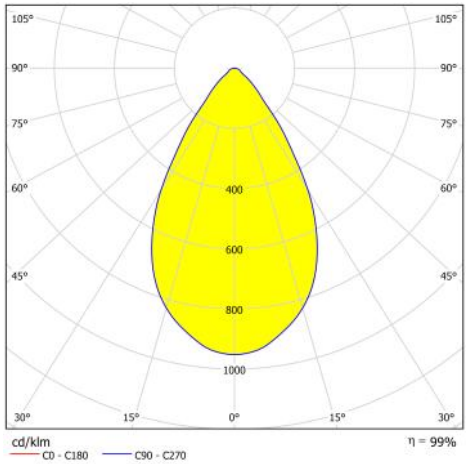

DSSAK.110.11.40.60

