



# DG 2008 SAK



## Housing

Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

## Optics

Highly efficient PMMA lens, designed specially for High Power LED.

## Led

High-efficacy High Power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and pf >0,8.

## Options


Dimming via DALI  
IP44/20 can be produced




Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)	Beam Angle
DGSAK. 080.6.30.25	6	3000	495	>80	220 - 240 / 50 - 60	0,32	70x70	25°
DGSAK. 080.6.40.25	6	4000	550	>80	220 - 240 / 50 - 60	0,32	70x70	25°
DGSAK. 080.6.30.35	6	3000	505	>80	220 - 240 / 50 - 60	0,32	70x70	35°
DGSAK. 080.6.40.35	6	4000	560	>80	220 - 240 / 50 - 60	0,32	70x70	35°
DGSAK. 080.6.30.60	6	3000	475	>80	220 - 240 / 50 - 60	0,32	70x70	60°
DGSAK. 080.6.40.60	6	4000	530	>80	220 - 240 / 50 - 60	0,32	70x70	60°
DGSAK. 080.8.30.25	8	3000	660	>80	220 - 240 / 50 - 60	0,32	70x70	25°
DGSAK. 080.8.40.25	8	4000	700	>80	220 - 240 / 50 - 60	0,32	70x70	25°
DGSAK. 080.8.30.35	8	3000	660	>80	220 - 240 / 50 - 60	0,32	70x70	35°
DGSAK. 080.8.40.35	8	4000	740	>80	220 - 240 / 50 - 60	0,32	70x70	35°
DGSAK. 080.8.30.60	8	3000	620	>80	220 - 240 / 50 - 60	0,32	70x70	60°
DGSAK. 080.8.40.60	8	4000	690	>80	220 - 240 / 50 - 60	0,32	70x70	60°
DGSAK. 080.11.30.25	11	3000	880	>80	220 - 240 / 50 - 60	0,32	70x70	25°
DGSAK. 080.11.40.25	11	4000	970	>80	220 - 240 / 50 - 60	0,32	70x70	25°
DGSAK.	11	3000	860	>80	220 - 240 / 50 - 60	0,32	70x70	35°


Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)	Beam Angle
080.11.30.35	11	3000	860	>80	60	0,32	70x70	35°
DGSAK. 080.11.40.35	11	4000	955	>80	220 - 240 / 50 - 60	0,32	70x70	35°
DGSAK. 080.11.30.60	11	3000	820	>80	220 - 240 / 50 - 60	0,32	70x70	60°
DGSAK. 080.11.40.60	11	4000	910	>80	220 - 240 / 50 - 60	0,32	70x70	60°

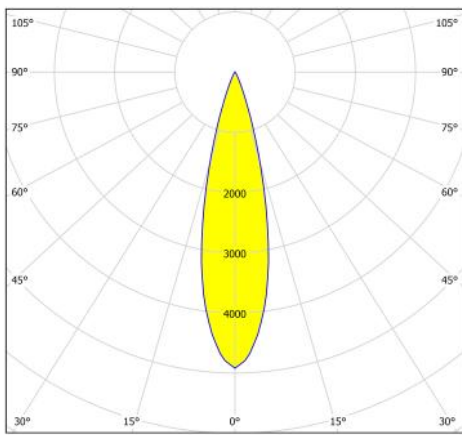

DSSAK.110.11.40.25

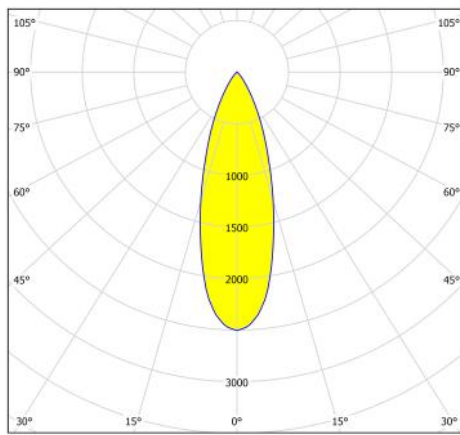

DGSAK.080.11.40.35

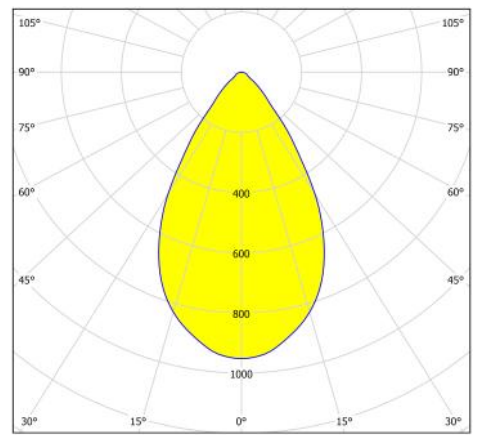

DSSAK.110.11.40.60

