




# DG 2213 SAK

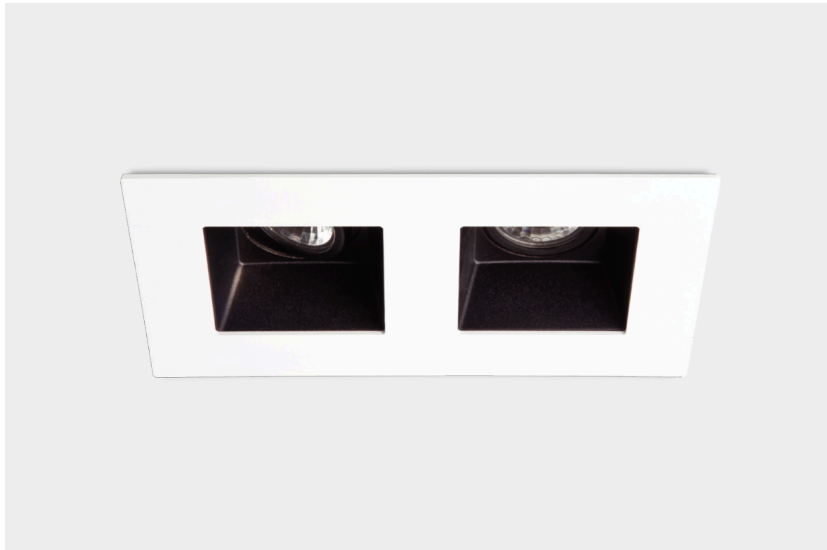

## Housing

Sheet steel frame with electrostatic powder coating and die-cast aluminum heatsink.

## Optics

Highly efficient PMMA lens, designed specially for High Power LED.

## Led

High-efficacy High Power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and Pf≥0.95

## Options

1 or 3 hours emergency lighting kit  
Dimming via DALI  
IP44/20 can be produced



Ral 9016 Ral 9005 Double

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)	Beam Angle
DGSAK. 2213.15.30.35	15	3000	1290	>80	220 - 240 / 50 - 60	1,3	120x220	35°
DGSAK. 2213.15.40.35	15	4000	1370	>80	220 - 240 / 50 - 60	1,3	120x220	35°

