



DG 1016 ATU



Housing

Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

Optics

Anodized aluminum reflector, designed specially for LED modules.

Led

High-efficacy COB LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

Driver Constant current output LED driver with high efficiency and pf >0,9


Operating Temperature Range 0 °C/+35 °C

Options 1 or 3 hours emergency lighting kit
Dimming via DALI




Ral 9016 Ral 9005 Ral 9006

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) | Cut-out Size (mm) | Beam Angle |
|------------------------|-----------|---------|-------------------|-----|---------------------|-------------|-------------------|------------|
| DGATU. 160.15.30.30 | 15 | 3000 | 1590 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 30° |
| DGATU. 160.15.40.30 | 15 | 4000 | 1570 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 30° |
| DGATU. 160.15.30.50 | 15 | 3000 | 1540 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 50° |
| DGATU. 160.15.40.50 | 15 | 4000 | 1610 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 50° |
| DGATU. 160.20.30.30 | 20 | 3000 | 2210 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 30° |
| DGATU. 160.20.40.30 | 20 | 4000 | 2320 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 30° |
| DGATU. 160.20.30.50 | 20 | 3000 | 2140 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 50° |
| DGATU. 160.20.40.50 | 20 | 4000 | 2240 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 50° |
| DGATU. 160.27.30.30 | 27 | 3000 | 2930 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 30° |
| DGATU. 160.27.40.30 | 27 | 4000 | 3070 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 30° |
| DGATU. 160.27.30.50 | 27 | 3000 | 2830 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 50° |
| DGATU. 160.27.40.50 | 27 | 4000 | 2960 | >80 | 220 - 240 / 50 - 60 | 0,9 | Ø142 | 50° |

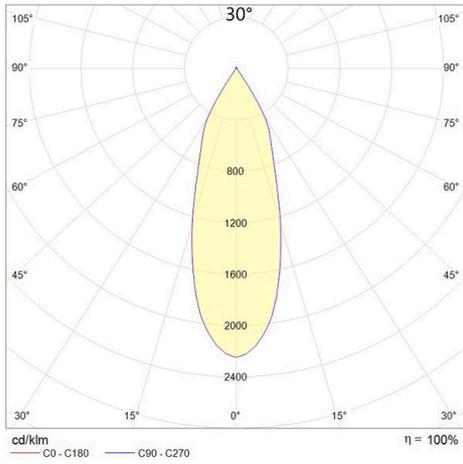

DG 1016 ATU 30°

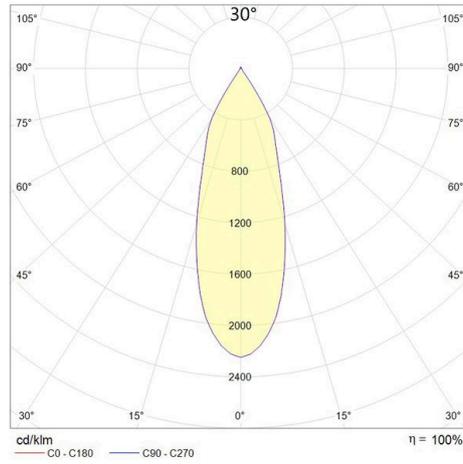

DG 1016 ATU 50°

