IP 54/20 | IK 02 | EMERGENCY

DG 1016 MON+

Housing
Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

OpticsOpal white polystyrene diffuser with lambertian light distribution and.

LedHigh-efficacy LED module with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

DriverConstant current output LED driver with high efficiency and pf >0,9.

Operating Temperature Range0 °C/+35 °C

Options
* 1 or 3 hours emergency lighting kit
* Dimming via DALI

Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
DGMON+.160.8.30	8	3000	950	>80	220 - 240 / 50 - 60	0,6	Ø142
DGMON+.160.8.40	8	4000	1030	>80	220 - 240 / 50 - 60	0,6	Ø142
DGMON+. 160.11.30	11	3000	1320	>80	220 - 240 / 50 - 60	0,6	Ø142
DGMON+160.11.40	11	4000	1410	>80	220 - 240 / 50 - 60	0,6	Ø142
DGMON+. 160.15.30	15	3000	1700	>80	220 - 240 / 50 - 60	0,6	Ø142
DGMON+160.15.40	15	4000	1840	>80	220 - 240 / 50 - 60	0,6	Ø142

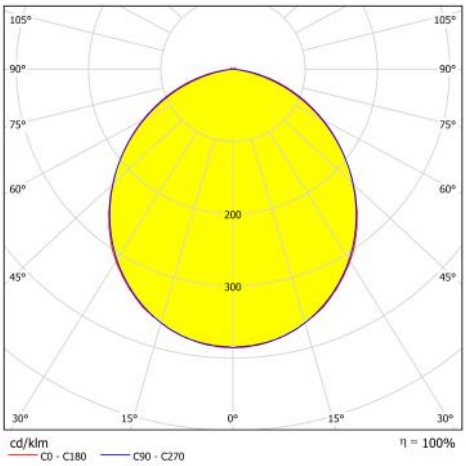

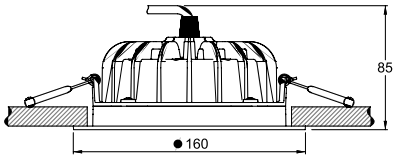
85
160