




# G 6060 BOY

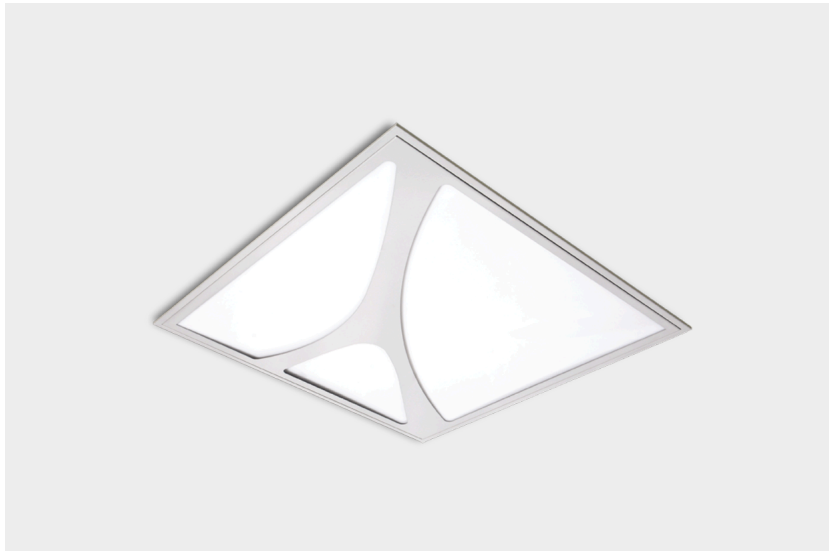

**Housing**

Sheet steel body with electrostatic powder coating.

**Optics**

Opal white polystyrene diffuser with lambertian light distribution.

**Led**


High-efficiency LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

**Driver**

Constant current output LED driver with high efficiency and P<sub>f</sub>≥0.95

**Options**

- \* 1 or 3 hours emergency lighting kit
- \* Dimming via DALI



Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
GBOY.6060.36.30	36	3000	3270	>80	220 - 240 / 50 - 60	4,7	580x580
GBOY.6060.36.40	36	4000	3620	>80	220 - 240 / 50 - 60	4,7	580x580
GBOY.6060.28.30	28	3000	2380	>80	220 - 240 / 50 - 60	4,7	580x580
GBOY.6060.28.40	28	4000	2620	>80	220 - 240 / 50 - 60	4,7	580x580

