




## DG 2028 KRA

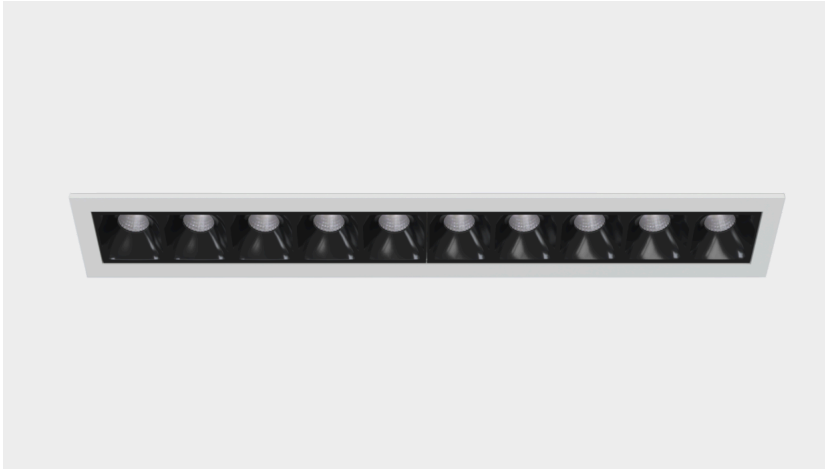

### Housing

Aluminum injection frame with electrostatic powder coating and die-cast aluminum heatsink.

### Optics

Highly efficient PMMA lens, designed specially for High Power LED.

### Led

High-efficacy High Power LED with CRI>80, achieving L70B50 ≥ 50,000 hours of lifetime.

### Driver

Constant current output LED driver with high efficiency and pf >0,9.

### Options

- \* Dimming via DALI
- \* 80° and 50° light distribution for lens
- \* Black and White color option for reflector

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Color
DGKRA. 280.23.40.90	23	4000	1925	>90	220 - 240 / 50 - 60	0,55	Beyaz Kasa (White Body)
DGKRA. 280.23.40.80	23	4000	2041	>80	220 - 240 / 50 - 60	0,55	Beyaz Kasa (White Body)
DGKRA. 280.23.30.90	23	3000	1740	>90	220 - 240 / 50 - 60	0,55	Beyaz Kasa (White Body)
DGKRA. 280.23.30.80	23	3000	1810	>80	220 - 240 / 50 - 60	0,55	Beyaz Kasa (White Body)
DGKRA. 280.30.40.90	30	4000	2510	>90	220 - 240 / 50 - 60	0,55	Beyaz Kasa (White Body)
DGKRA. 280.30.40.80	30	4000	2700	>80	220 - 240 / 50 - 60	0,55	Beyaz Kasa (White Body)
DGKRA. 280.30.30.90	30	3000	2450	>90	220 - 240 / 50 - 60	0,55	Beyaz Kasa (White Body)
DGKRA. 280.30.30.80	30	3000	2571	>80	220 - 240 / 50 - 60	0,55	Beyaz Kasa (White Body)

