



G 3030 OPL

Housing

Sheet steel body with electrostatic powder coating.

Optics

Opal white polystyrene diffuser with lambertian light distribution.

Led High-efficiency LED with CRI>80, achieving L90B50 \geq 50,000 hours of lifetime.

Driver


Constant current output LED driver with high efficiency and $Pf \geq 0.95$

Options

1 or 3 hours emergency lighting kit
Dimming via DALI



Ral 9016 Ral 9006

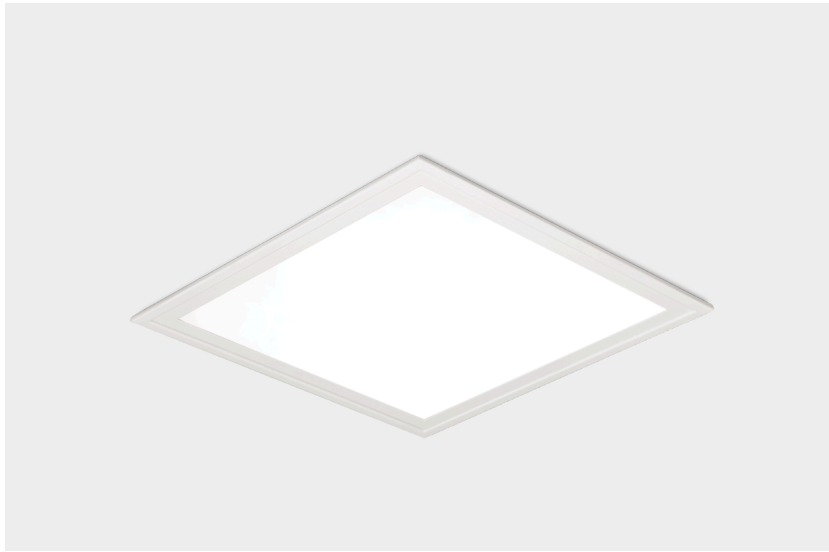

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
GOPL.3030.10.30	10	3000	850	>80	220 - 240 / 50 - 60	1,9	335x335
GOPL.3030.10.40	10	4000	900	>80	220 - 240 / 50 - 60	1,9	335x335

