



# G 3030 OPL

## Housing

Sheet steel body with electrostatic powder coating.

## Optics

Opal white polystyrene diffuser with lambertian light distribution.


**Led** High-efficiency LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

## Driver


Constant current output LED driver with high efficiency and P<sub>f</sub>≥0.95

## Options

1 or 3 hours emergency lighting kit  
Dimming via DALI



Ral 9016 Ral 9006

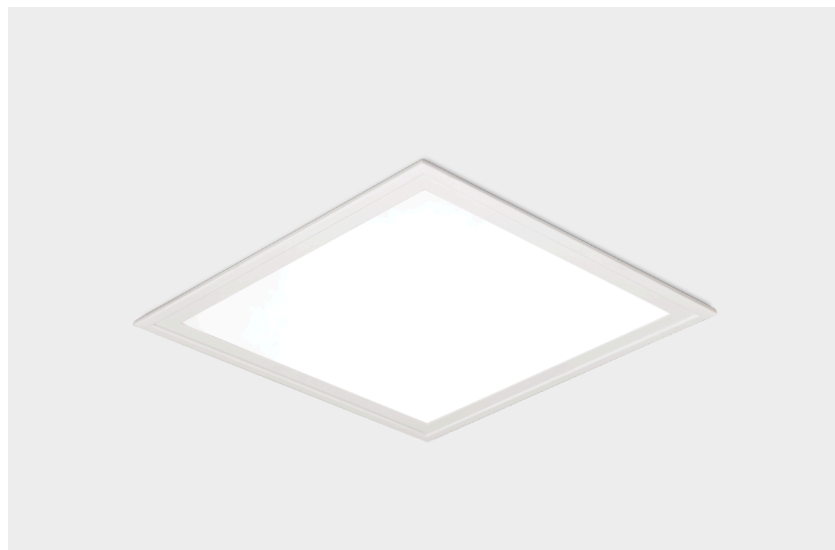

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)	Cut-out Size (mm)
GOPL.3030.10.30	10	3000	850	>80	220 - 240 / 50 - 60	1,9	335x335
GOPL.3030.10.40	10	4000	900	>80	220 - 240 / 50 - 60	1,9	335x335

