G 6060 PPT



Housing
Sheet steel body with electrostatic powder coating.

Optics
Opal white polystyrene diffuser with lambertian light distribution.


Led
High-efficiency LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

Driver
Constant current output LED driver with high efficiency and Pf≥0.95

Options
* 1 or 3 hours emergency lighting kit
* Dimming via DALI

Ral 9016 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
GPPT.6060.20.30	20	3000	2390	>80	220 - 240 / 50 - 60	3,2
GPPT.6060.20.40	20	4000	2540	>80	220 - 240 / 50 - 60	3,2
GPPT.6060.27.30	27	3000	3110	>80	220 - 240 / 50 - 60	3,2
GPPT.6060.27.40	27	4000	3300	>80	220 - 240 / 50 - 60	3,2
GPPT.6060.36.30	36	3000	4000	>80	220 - 240 / 50 - 60	3,2
GPPT.6060.36.40	36	4000	4250	>80	220 - 240 / 50 - 60	3,2
GPPT.6060.42.30	42	3000	4490	>80	220 - 240 / 50 - 60	3,2
GPPT.6060.42.40	42	4000	4780	>80	220 - 240 / 50 - 60	3,2

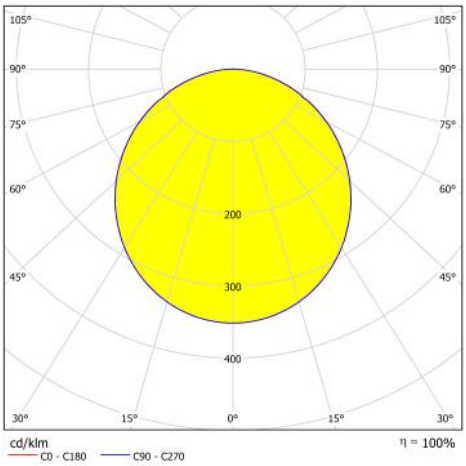


595
595