G 6060 EPM



Housing
Aluminium profile frame, steel back cover with electrostatic powder coating

Optics
PS microprism louvre, PMMA LGP diffuser (UGR<19)

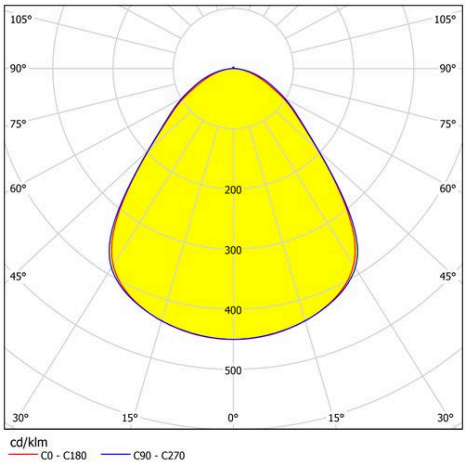
Led
High-efficiency LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.90 ≥, 80,000 hours of lifetime,

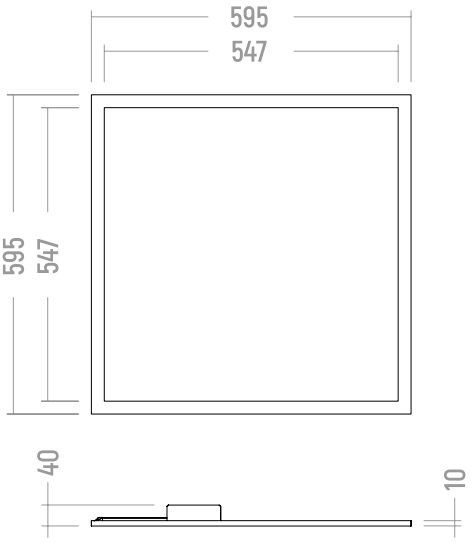
Driver
Constant current output LED driver with high efficiency,
Pf ≥ 0.95

Installation
For T-bar ceiling only (15 or 24 mm)

Ral 9016

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
GEPM.6060.20.40	20	4000	2380	>80	220 - 240 / 50 - 60	3,33
GEPM.6060.20.30	20	3000	2240	>80	220 - 240 / 50 - 60	3,33
GEPM.6060.27.40	27	4000	3230	>80	220 - 240 / 50 - 60	3,33
GEPM.6060.27.30	27	3000	3030	>80	220 - 240 / 50 - 60	3,33
GEPM.6060.36.40	36	4000	3710	>80	220 - 240 / 50 - 60	3,33
GEPM.6060.36.30	36	3000	3390	>80	220 - 240 / 50 - 60	3,33
GEPMP.6060.19.40	19	4000	2360	>80	220 - 240 / 50 - 60	3,33
GEPMP.6060.19.30	19	3000	2220	>80	220 - 240 / 50 - 60	3,33
GEPMP.6060.27.40	27	4000	3270	>80	220 - 240 / 50 - 60	3,33
GEPMP.6060.27.30	27	3000	3080	>80	220 - 240 / 50 - 60	3,33
GEPMP.6060.30.40	30	4000	3820	>80	220 - 240 / 50 - 60	3,33
GEPMP.6060.30.30	30	3000	3590	>80	220 - 240 / 50 - 60	3,33


105°
105°
90°
90°
75°
75°
60°
60°
45°
45°
200
300
400
500
30°
15°
0°
15°
30°
cd/klm
C0 - C180
C90 - C270


595
547
595
547
40
10