




G 3012 EPM

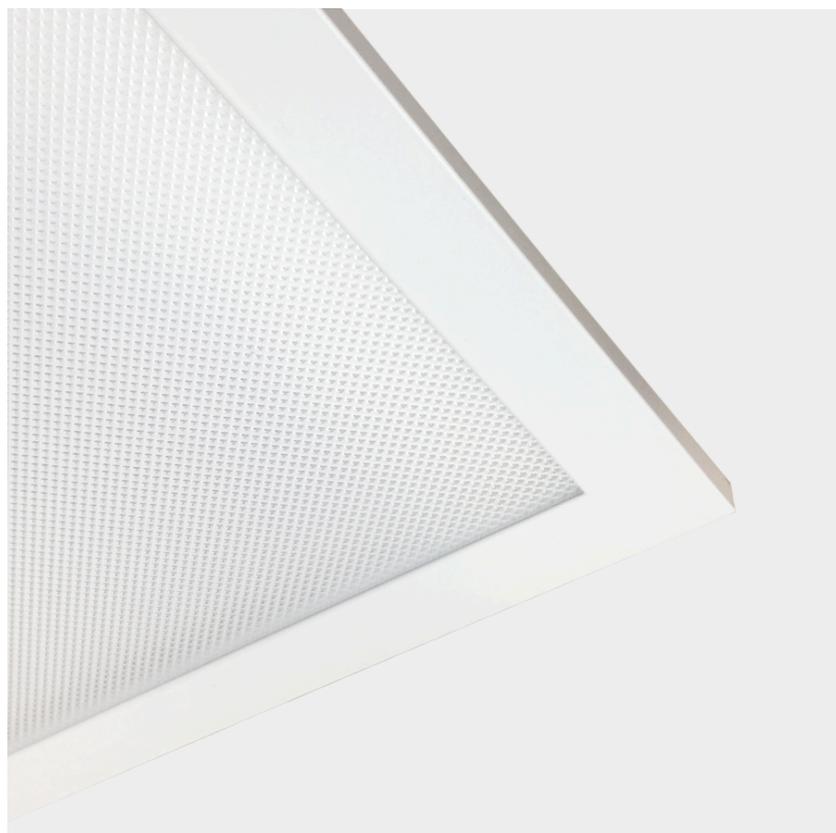

Housing

Aluminium profile frame, steel back cover with electrostatic powder coating

Optics

PS microprism louvre, PMMA LGP diffuser (UGR<19)

Led

High-efficiency LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

Driver

Constant current output LED driver with high efficiency, Pf ≥ 0.95

Installation

For T-bar ceiling only (15 or 24 mm)



Ral 9016

| Type Code | Power (w) | CCT (K) | Light Output (lm) | CRI | V/Hz | Weight (Kg) |
|------------------|-----------|---------|-------------------|-----|---------------------|-------------|
| GEPM.3012.20.40 | 20 | 4000 | 2170 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPM.3012.20.30 | 20 | 3000 | 2060 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPM.3012.27.40 | 27 | 4000 | 3040 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPM.3012.27.30 | 27 | 3000 | 2780 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPM.3012.36.40 | 36 | 4000 | 3530 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPM.3012.36.30 | 36 | 3000 | 3450 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPMP.3012.19.40 | 19 | 4000 | 2410 | >80 | 220 - 240 / 50 - 60 | 3,42 |
| GEPMP.3012.19.30 | 19 | 3000 | 2150 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPMP.3012.27.40 | 27 | 4000 | 3350 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPMP.3012.27.30 | 27 | 3000 | 3000 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPMP.3012.30.40 | 30 | 4000 | 3680 | >80 | 220 - 240 / 50 - 60 | 3,48 |
| GEPMP.3012.30.30 | 30 | 3000 | 3410 | >80 | 220 - 240 / 50 - 60 | 3,48 |

