G 6060 RAL



Housing
Sheet steel body with electrostatic powder coating.

Optics
Anti-glare reflector and 80° optical lens

LedHigh-efficiency LED with CRI>80, achieving L90B50 ≥ 50,000 hours of lifetime.

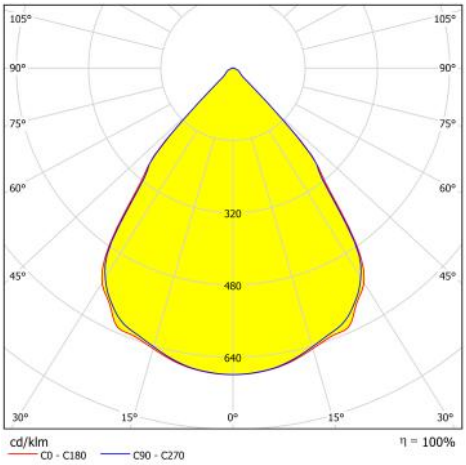
Driver
Constant current output LED driver with high efficiency and Pf≥0.95

Options
1 or 3 hours emergency lighting kit
Dimming via DALI
Black and white color option for reflector



Ral 9016 Double

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
GRAL.6060.B.23.30	23	3000	2920	>80	220 - 240 / 50 - 60	5,4
GRAL.6060.B.23.40	23	4000	3110	>80	220 - 240 / 50 - 60	5,4
GRAL.6060.B.30.30	30	3000	3950	>80	220 - 240 / 50 - 60	5,4
GRAL.6060.B.30.40	30	4000	4200	>80	220 - 240 / 50 - 60	5,4
GRAL.6060.W.23.30	23	3000	3260	>80	220 - 240 / 50 - 60	5,4
GRAL.6060.W.23.40	23	4000	3460	>80	220 - 240 / 50 - 60	5,4
GRAL.6060.W.30.30	30	3000	4410	>80	220 - 240 / 50 - 60	5,4
GRAL.6060.W.30.40	30	4000	4700	>80	220 - 240 / 50 - 60	5,4


105°
105°
90°
90°
75°
75°
60°
60°
320
480
640
45°
45°
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0 - C180
C90 - C270


568
592
40
595
595