




# SK 3012 BRC

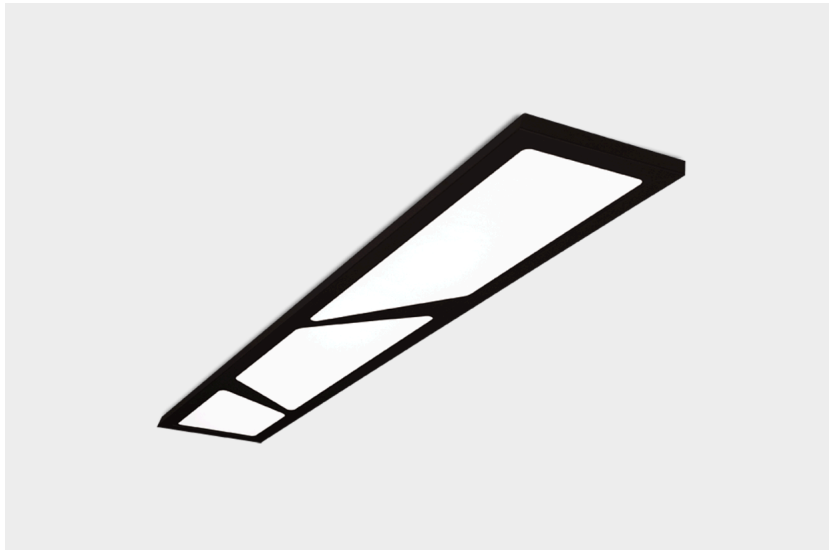

## Housing

Sheet steel body with electrostatic powder coating.

## Optics

Opal white polystyrene diffuser with lambertian light distribution.

## Led

High-efficacy LED with CRI>80, achieving L90B50  $\geq$  50,000 hours of lifetime.

## Driver

Constant current output LED driver with high efficiency and  $Pf \geq 0.95$

## Options

Dimming via DALI



Ral 9016 Ral 9005 Ral 9006

Type Code	Power (w)	CCT (K)	Light Output (lm)	CRI	V/Hz	Weight (Kg)
SKBRC.3012.39.30	39	3000	2700	>80	220 - 240 / 50 - 60	5
SKBRC.3012.39.40	39	4000	3000	>80	220 - 240 / 50 - 60	5

